

(19) World Intellectual Property Organization  
International Bureau



(43) International Publication Date  
19 September 2002 (19.09.2002)

PCT

(10) International Publication Number  
**WO 02/072162 A2**

(51) International Patent Classification<sup>7</sup>: **A61L 15/00**

(74) Agent: **GWIN, Doreen, S., L.**; Office of Intellectual Property Counsel, Post Office Box 33427, Saint Paul, MN 55133-3427 (US).

(21) International Application Number: **PCT/US02/00350**

(22) International Filing Date: **8 January 2002 (08.01.2002)**

(25) Filing Language: **English**

(26) Publication Language: **English**

(30) Priority Data:  
**09/764,540**      **17 January 2001 (17.01.2001)**      **US**

(71) Applicant: **3M INNOVATIVE PROPERTIES COMPANY [US/US]**; 3M Center, Post Office Box 33427, Saint Paul, MN 55133-3427 (US).

(81) Designated States (*national*): AE, AG, AL, AM, AT, AT (utility model), AU, AZ, BA, BB, BG, BR, BY, BZ, CA, CH, CN, CO, CR, CU, CZ, CZ (utility model), DE, DE (utility model), DK, DM, DZ, EC, EE, EE (utility model), ES, FI, FI (utility model), GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW, MX, MZ, NO, NZ, OM, PH, PL, PT, RO, RU, SD, SE, SG, SI, SK, SK (utility model), SL, TJ, TM, TN, TR, TT, TZ, UA, UG, UZ, VN, YU, ZA, ZM, ZW.

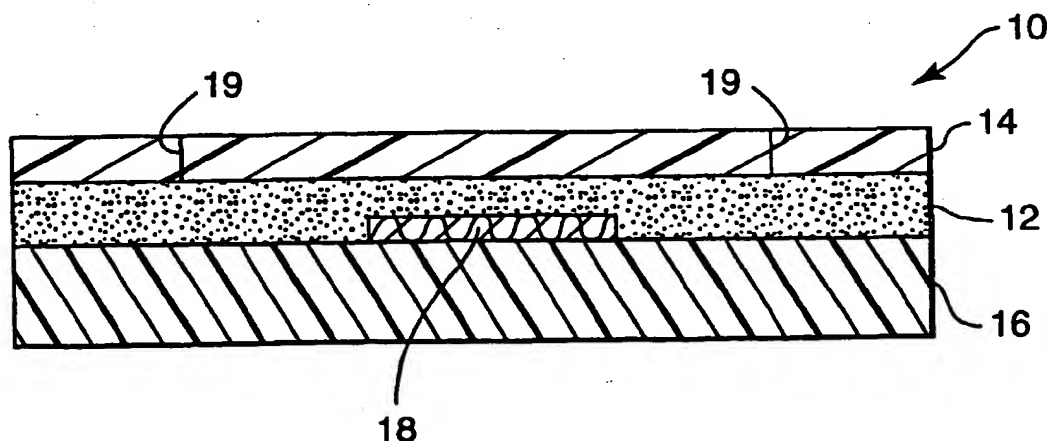
(84) Designated States (*regional*): ARIPO patent (GH, GM, KE, LS, MW, MZ, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European patent (AT, BE, CH, CY, DE, DK, ES, FI, FR, GB, GR, IE, IT, LU, MC, NL, PT, SE, TR), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

**Published:**

— *without international search report and to be republished upon receipt of that report*

*For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.*

(54) Title: **STRETCH REMOVABLE ADHESIVE ARTICLES AND METHODS**



(57) Abstract: Pressure sensitive adhesive articles and methods, particularly stretch removable adhesive articles that are preferably for use in adhering to skin or like delicate surfaces. Preferably, stretch removability of the article occurs as a result of the selection of a stretch removable pressure sensitive adhesive. In one embodiment of the articles and methods, the adhesive and backing delaminate upon removal. In another embodiment of the articles and methods, the backing includes a predefined tab located in a central location of the backing.

WO 02/072162 A2

## 5        **STRETCH REMOVABLE ADHESIVE ARTICLES AND METHODS**

### Background of the Invention

      The invention relates to pressure sensitive adhesive products, particularly stretch removable adhesive articles. Preferably, such articles are for use in  
10    adhering to skin or like delicate surfaces. Stretch removability occurs as a result of the selection of a stretch removable adhesive, i.e., one that has sufficient internal strength that it can be gripped and removed on its own even in the absence of a backing, or as a result of the selection of a stretch removable backing, i.e., a backing that allows a construction that includes a weaker  
15    adhesive to be removed by stretching.

      Pressure sensitive adhesive tapes and the like are used in a wide variety of applications where there is a need to adhere to skin, for example, medical tapes, wound or surgical dressings, athletic tapes, surgical drapes, or tapes or tabs used in adhering medical devices such as sensors, electrodes, ostomy appliances,  
20    or the like. A concern with all these adhesive-coated products is the need to balance the objective of providing sufficiently high levels of adhesion to ensure that the pressure sensitive adhesive products do not fall off, while ensuring that the underlying skin or other delicate surface experiences a low amount of trauma, damage, or irritation during use and/or removal. These goals are  
25    generally conflicting. Many approaches have been suggested to balance these conflicting goals; however, there still remains a need for products that effectively do so.

      For example, film-backed, normally tacky, pressure sensitive adhesive tapes that are highly stretchy and elastic are known that can be easily removed  
30    from a surface by stretching the tapes lengthwise in a direction substantially parallel to the plane of the surface. For such tapes the adhesion capability substantially disappears as the film is being stretched. If such tapes are too elastic, they may exhibit large recoil when the stretching force is removed, which

can be undesirable. Additionally, highly elastic tapes tend to substantially recover their original shape when the stretching force is removed, and they are therefore not useful for indication of tampering or for guaranteeing single uses for hygienic purposes.

- 5           Such so-called "stretch release" or "stretch removable" adhesive constructions include backings having stretchabilities that typically match those of the adhesives. Other backings of differing stretchability can be used by using a pre-treated/damaged backing having a strength that is inconsequential in the stretch removal process and an adhesive that is substantial enough to alone
- 10 support the stretch removal process, i.e., a stretch removable adhesive. Although many of such constructions are useful, there is still a need for stretch removable adhesive articles, particularly those that can be easily removed from a surface such as skin or other delicate surface without a significant amount of pain, trauma, damage, or irritation.

15

### **Summary of the Invention**

- The present invention provides methods and stretch removable adhesive articles that include a backing and a pressure sensitive adhesive layer disposed thereon. Preferably, the adhesive itself is stretch removable. Preferably, the
- 20 adhesive is one that is suitable for use on skin and the adhesive article is in the form of a medical article, such as medical tapes, wound or surgical dressings, athletic tapes, surgical drapes, tapes or tabs used in adhering medical devices such as sensors, electrodes, ostomy appliances, and the like.

- In one general embodiment, the backing and adhesive are selected such
- 25 that they delaminate upon removal from skin (or similar delicate surface). Typically and preferably, this involves selecting the backing and adhesive such that the stretchability of the adhesive layer is greater than that of the backing under the same tension. In another general embodiment, the backing includes a predefined tab (i.e., handle) located in a central portion of the backing, which can
- 30 be used in a wide variety of adhesive articles, whether for medical or nonmedical uses.

More specifically with respect to one of the general embodiments, the present invention provides methods of removal, methods of making, and medical articles that delaminate upon removal from skin. One removal method involves: providing a medical article adhered to skin, wherein the medical article includes a backing and a stretch removable pressure sensitive adhesive layer disposed thereon; and stretching the medical article in an amount sufficient to delaminate the adhesive layer from the backing and remove the medical article from the skin. Preferably, stretching the medical article includes stretching it in a direction substantially parallel to the plane of the skin to which it is adhered. Preferably, the backing and adhesive are selected such that the stretchability at break of the adhesive layer is greater than that of the backing under the same tension, and more preferably, at least about 10% greater.

Another method of removing a medical article from skin that delaminates upon removal includes: providing a medical article adhered to skin, wherein the medical article includes a backing and a stretch removable pressure sensitive adhesive layer disposed thereon; and stretching the medical article in an amount sufficient to delaminate the adhesive layer from the backing and remove the medical article from the skin. In this embodiment: the backing and the adhesive layer are selected such that the stretchability of the adhesive layer is greater than that of the backing under the same tension; the stretch removable pressure sensitive adhesive layer includes a pressure sensitive adhesive matrix and a fibrous reinforcing material within the pressure sensitive adhesive matrix; and the adhesive layer has a yield strength and a tensile strength, and wherein the tensile strength is about 0.7 MPa or greater, and at least about 150% of the yield strength.

Yet another method of removing a medical article that delaminates involves: providing a medical article adhered to skin, wherein the medical article includes a backing and a stretch removable pressure sensitive adhesive layer disposed thereon; and stretching the medical article in a direction relative to the skin to which it is adhered sufficient to delaminate the adhesive layer from the backing and remove the article from the skin. In this embodiment: the backing and the adhesive layer are selected such that the stretchability of the

adhesive layer is greater than that of the backing under the same tension; the stretch removable pressure sensitive adhesive layer includes a pressure sensitive adhesive matrix that includes a polymer derived from at least one alkyl ester monomer selected from isooctyl acrylate, 2-ethyl-hexyl acrylate, and n-butyl acrylate, and at least one co-monomer selected from acrylic acid and acrylamide; and a fibrous reinforcing material within the pressure sensitive adhesive matrix; and the adhesive layer has a yield strength and a tensile strength, and wherein the tensile strength is about 0.7 MPa or greater, and at least about 150% of the yield strength.

10 Preferably, a medical article that delaminates upon removal is provided and includes a backing and a stretch removable pressure sensitive adhesive layer disposed thereon. The backing and the adhesive layer are selected such that the stretchability of the adhesive layer is greater than that of the backing under the same tension and the adhesive layer and backing delaminate when removed from skin. Preferably, for enhanced delamination, the adhesive layer and backing form separate phases (i.e., are in separate layers).

For the articles that delaminate upon removal, the adhesive layer can include a wide variety of polymers, such as a poly(meth)acrylate (e.g., a polymer derived from at least one alkyl ester monomer selected from isooctyl acrylate, 2-ethyl-hexyl acrylate, and n-butyl acrylate, and at least one co-monomer selected from acrylic acid and acrylamide) or an A-B-A block copolymer. It can be reinforced as with a fibrous reinforcing material. Preferably, the adhesive layer includes: a pressure sensitive adhesive matrix; and a fibrous reinforcing material within the pressure sensitive adhesive matrix; wherein the adhesive layer has a yield strength and a tensile strength, and wherein the tensile strength is about 0.7 MPa or greater, and at least about 150% of the yield strength.

The present invention also provides a method of making a medical article that delaminates upon removal as described above. The method includes providing a backing; selecting a stretch removable pressure sensitive adhesive such that the stretchability of the adhesive layer disposed on the backing is greater than that of the backing under the same tension; and laminating the backing and the pressure sensitive adhesive layer together under conditions of

temperature and pressure that allow the adhesive layer and backing to delaminate when removed from skin.

With respect to another general embodiment, the present invention also provides methods of removal, methods of making, and articles that include a predefined tab on the backing. Specifically, the present invention provides a stretch removable adhesive article that includes a backing with a predefined tab and a pressure sensitive adhesive layer disposed on a major surface of the backing opposite that of the tab, wherein the predefined tab is located in a central portion of the backing. Preferably, the pressure sensitive adhesive is a stretch removable pressure sensitive adhesive. More preferably, the backing and the adhesive layer are selected such that the stretchability of the adhesive layer is greater than that of the backing under the same tension, more preferably, at least about 10% greater.

For the articles that include a predefined tab, the adhesive layer can include a wide variety of polymers, such as a poly(meth)acrylate (e.g., a polymer derived from at least one alkyl ester monomer selected from isooctyl acrylate, 2-ethyl-hexyl acrylate, and n-butyl acrylate, and at least one co-monomer selected from acrylic acid and acrylamide) or an A-B-A block copolymer. It can be reinforced as with a fibrous reinforcing material. Preferably, the adhesive layer includes: a pressure sensitive adhesive matrix; and a fibrous reinforcing material within the pressure sensitive adhesive matrix; wherein the adhesive layer has a yield strength and a tensile strength, and wherein the tensile strength is about 0.7 MPa or greater, and at least about 150% of the yield strength.

The tab can be in a wide variety of shapes, sizes, and made of a wide variety of materials. In one preferred embodiment, the tab includes a portion of the backing and a portion of the adhesive layer. In another preferred embodiment, the backing includes two pieces (optionally overlapping pieces), preferably each with a nonadhesive end (i.e., an end free of exposed adhesive) that forms a tab.

In a preferred embodiment of the article with a predefined tab, the present invention provides a stretch removable adhesive article that includes a backing with a predefined tab and a stretch removable pressure sensitive adhesive layer

disposed thereon, wherein the predefined tab is located in a central portion of the backing, and further wherein the backing and the adhesive layer are selected such that the stretchability of the adhesive layer is greater than that of the backing under the same tension. Preferably, the adhesive layer includes: a pressure  
5 sensitive adhesive matrix; and a fibrous reinforcing material within the pressure sensitive adhesive matrix; wherein the adhesive layer has a yield strength and a tensile strength, and wherein the tensile strength is about 0.7 MPa or greater, and at least about 150% of the yield strength.

The present invention also provides a method of removing an article  
10 having a predefined tab from a surface. The method involves: providing a stretch removable adhesive article adhered to a surface, wherein the article includes a backing with a predefined tab and a pressure sensitive adhesive layer disposed thereon, wherein the predefined tab is located in a central portion of the backing; and pulling on the tab to stretch the adhesive article in an amount  
15 sufficient to remove the article from the surface. Preferably, the pressure sensitive adhesive is a stretch removable pressure sensitive adhesive. More preferably, the backing and adhesive are selected such that the stretchability of the adhesive layer is greater than that of the backing under the same tension.

There is also provided a method of making a medical article that  
20 involves: providing a backing with a predefined tab located in a central portion of the backing; and applying a stretch removable pressure sensitive adhesive to a major surface of the backing opposite that of the predefined tab. The step of applying can involve laminating, spray coating, etc.

In this application, the following terms are defined as follows, unless  
25 otherwise stated:

“Delamination” or “delaminate” means that, upon stretching an adhesive article, the adhesive separates (i.e., detaches) from at least a portion of the backing.

“Elastic” means how well a stretched material will recover. An elastic  
30 material is one that will recover by at least about 50% after being stretched in at least one direction, preferably by at least about 60%, more preferably by at least

about 75%, and most preferably by at least about 100% after being stretched (i.e., it returns to its original size). An inelastic or nonelastic material is one that will recover by less than about 50% after being stretched.

“Stretchability” means how far a material can be elongated. A stretchable material is one that does not break upon elongating the material by at least about 20% in at least one direction. Unless otherwise stated, stretchability is assumed to be for elongation of a material in the lengthwise direction. A nonstretchable material is one that breaks upon stretching the material by less than about 20%. Percent stretchability (or elongation) at a given tension/force or at break can be measured by inspection of the plots generated via ASTM D3759 (1996) or D5459 (1995).

“Stretch removable” means that a pressure sensitive adhesive or article, when pulled and elongated (preferably from a substrate surface at a rate of 30 centimeters/minute and at an angle of no greater than 45°) detaches from a substrate surface without significant damage to the substrate surface (e.g., tearing), and without leaving a significant residue, preferably that which is visible to the unaided human eye on the substrate.

“Substantially continuous” means that for an at least 0.5 centimeter length sample of the adhesive composition taken in the machine direction, at least 50% of the fibers present in the sample are continuous (i.e., unbroken).

“Tensile strength” is the maximum tensile strength at break when tested according to ASTM D 882-97 at a crosshead speed of 12 inches/minute (30 centimeters/minute).

## **Brief Description of the Drawings**

FIG. 1 is an enlarged side view in cross-section of an adhesive tape of the present invention that includes a backing, optionally perforated, in the unstretched position.

FIG. 2 is an enlarged side view in cross-section of an adhesive tape with the adhesive having been stretched and beginning to be removed from the substrate and delaminate from the backing.



FIG. 3 is an enlarged side view in cross-section of a first aid dressing of the present invention that includes a perforated backing with perforations near the gauze pad with the backing having been broken and the adhesive having been stretched and beginning to cease holding to both the substrate and the backing.

5        FIGS. 4-11 are representations of embodiments of the adhesive articles of the present invention having various types of tabs.

### **Detailed Description of Preferred Embodiments**

The present invention provides stretch removable adhesive articles, particularly adhesive articles that include a backing having a stretch removable pressure sensitive adhesive layer disposed on at least one major surface thereof. Preferably, the adhesive articles are designed for use on skin or other delicate surfaces with no significant damage to the skin or other delicate surface, and if the surface is skin, there is little or no pain upon removal of the adhesive article.

15        Preferably, such adhesive articles are tapes that include gauze pads, for example, and are used as first aid dressings (i.e., wound or surgical dressings). The adhesive articles can be in the form of a wide variety of other medical articles, such as medical tapes, athletic tapes, surgical drapes, or tapes or tabs used in adhering medical devices such as sensors, electrodes (as disclosed in 20 U.S. Pat. No. 5,215,087 (Anderson et al.), and U.S. Pat. No. 6,171,985 (Joseph et al.), for example), ostomy appliances, or the like. Adhesive articles of the present invention can also be in the form of removable labels, coupons, masking tapes, tapes or tabs used in adhering diapers, packaging, food storage containers, etc. They can be used in tamper-indicating applications, particularly if upon 25 stretching, the adhesive articles do not recover their original shape. Preferred embodiments, however, are medical articles.

Generally, adhesive articles (e.g., tapes) of the present invention are designed to be removed from a surface with concomitant delamination of the adhesive layer from the backing or by using a predefined tab located in a central 30 portion of the backing (preferably, over a gauze pad). These designs provide significant advancements, particularly in the area of medical articles because of

the ability to remove an adhesive article (e.g., bandage, tape) without significant pain, irritation, or injury to the underlying skin.

If delamination during removal is desired, the backing and adhesive are preferably selected such that the stretchability of the adhesive is greater than that of the backing. Preferably, the stretchability at break of the adhesive is at least about 10% greater than that of the backing. Generally, with conventional stretch removable adhesive articles the backing and the stretch removable adhesive are selected such that they stretch together for effective release; however, with adhesive articles of the present invention, delamination of the adhesive from the backing allows for a mismatch in stretch.

Selection of an adhesive and a backing for those embodiments in which delamination is desired involves evaluating each of their respective stretchabilities as well as their bonding capacity for each other and for the surface to which they are adhered. That is, the adhesive and backing are selected such that they have sufficient adhesion to each other and do not separate from each other prior to removal of the adhesive article from a surface to which it is adhered. Stretchability can be determined by measuring the elongation of a material or construction when pulled by a known force up to and including the point at break, such as by using an INSTRON machine according to ASTM D3759 (1996) or D5459 (1995). Preferably, the stretchability at break of the adhesive (layer) is at least about 100%, more preferably, at least about 300%, and most preferably, at least about 400%. Preferably, the stretchability at break of the adhesive is no greater than about 800%.

Preferred adhesive articles of the present invention have an initial adhesion to a surface, such as skin for medical articles, of at least about 20 grams per 2.5 centimeters (0.8 Newtons per decimeter), and more preferably, at least about 40 grams per 2.5 centimeters (1.6 N/dm). This can be evaluated, for example, using PSTC-1 Peel Adhesion Test, a testing protocol established by the Specifications and Technical Committee of the Pressure-sensitive Tape Council located at 5700 Old Orchard Road, Skokie, IL.

Effective adhesion between the backing and adhesive can be determined by ASTM D1876 (1995). Preferred adhesives and backings of the present

invention have an initial adhesion to each other of at least about 10 grams per 2.5 centimeters (0.4 Newtons per decimeter), and more preferably, at least about 20 grams per 2.5 centimeters (0.8 N/dm). This adhesion can be affected not only by the choice of materials but also by the lamination and/or coating process. For example, conditions of lamination and/or coating involve those wherein the adhesive layer and backing maintain separate layers (i.e., phases). That is, neither melting of the adhesive or backing occurs during the laminating process to form a separate continuous layer at the interface, nor does the adhesive deform and flow into the backing, as in a nonwoven web backing, for example.

Delamination means that, upon stretching an adhesive article, the adhesive separates (i.e., detaches) from at least a portion of the backing. Preferably, the adhesive separates from at least about 50% of the area of the backing, more preferably, the adhesive separates from at least about 60%, even more preferably, at least about 80%, and most preferably, at least about 95%, of the area of the backing, wherein the area of the backing is determined after the article is stretched and removed from a surface. Typically to accomplish delamination, the internal (i.e., structural) strength of the adhesive is greater than the adhesion of the adhesive to the backing. Delamination can be enhanced, for example, by laminating under low pressure and/or low temperature, eliminating pretreatment methods (e.g., corona treatment) typically used in preparing adhesive articles, by using a low adhesion backsize between the backing and the adhesive layer, by roughening the backing to lower the contact area between the backing and a stiff adhesive, etc.

Preferably, for effective delamination upon removal of an adhesive article from a surface, the lamination temperature during the manufacturing process of the adhesive article does not exceed the softening temperature of either the backing material or any reinforcing materials in the adhesive layer. Laminating above the softening temperature but below the melting temperature is typically not sufficient, since diffusion and adhesion can build up significantly above the softening temperature. For example, many ethylene vinyl acetate materials have melting temperatures about 60°C to about 90°C with softening temperatures about 40°C to about 75°C.

Generally, delamination occurs upon stretching an adhesive article lengthwise in a direction substantially parallel to the plane of the surface to which it is adhered (prior to pulling), although this is not a necessary requirement to accomplish delamination (i.e., delamination can occur upon pulling and stretching the article in a direction from about 0° to about 90° from the surface to which it is attached). A simple test to determine if the backing and adhesive have sufficiently different stretchability to allow for delamination is to place a piece of the adhesive construction (1 centimeter by 4 centimeters) on a desired surface, for example, skin, a mirror-finished steel panel, or a polypropylene substrate, by rubbing down with light thumb pressure, optionally allowing for the adhesion to the substrate surface to build over a short period of time (e.g., about 10 minutes), and then pulling and stretching at a desired rate (for example, 30 or 152 centimeters per minute) at a desired angle (preferably at an angle no greater than about 45° from the plane of the adhesive bond, and more preferably lengthwise in a direction substantially parallel to the plane of the adhesive bond). The construction is then visually examined to determine if at least a portion of the area of the backing (after stretching) has been separated from the adhesive during removal. Because the backing can be stretched without recovery, the area of the backing used to make this evaluation is that after the stretch removal process.

In certain adhesive articles of the present invention, and independent of whether or not delamination occurs upon stretch removal, the backing includes a predefined tab located in a central portion of the backing (i.e., the about 80% of the mid portion of the backing along its length). Such adhesive articles having tabs can be used in a wide variety of applications, as discussed above. Typically, the adhesive article is removed by pulling the tab in a direction that is substantially normal to the plane of the surface to which the article is adhered (prior to pulling), although this is not a necessary requirement for effective functioning of the tab (i.e., removal can occur upon pulling the tab in a direction from about 0° to about 90° from the surface to which it is attached). With a tab (i.e., handle) in a central portion of a backing, the adhesive article typically does

not get scraped over the wound as it is being removed as often can occur when it is pulled from an end across the wound. Preferably, by placing the tab in a central portion of the backing, the force of elongation can be distributed over two portions of the adhesive article (i.e., the two portions on either side of the tab).

5

### **Pressure Sensitive Adhesive**

A wide variety of pressure sensitive adhesives can be used for this invention as long as they are stretch removable or are part of an adhesive article (i.e., adhesive construction) that is stretch removable. Preferably, the adhesive  
10 itself is stretch removable as defined above. Preferably, the stretch removable pressure sensitive adhesive is one that is suitable for use on skin, for example, acrylate polymers, natural and synthetic rubbers, silicone polymers, polyurethanes, polyolefins, and poly(vinyl ethers), as generally described in the article "Medical Adhesives: Adhesive Considerations for Developing Stick-to-  
15 Skin Products," Adhesives Age, October, 2000.

The pressure sensitive adhesive can be any material that has pressure sensitive adhesive properties. One well known means of identifying pressure sensitive adhesives is the Dahlquist criterion. This criterion defines a pressure sensitive adhesive as an adhesive having a 1 second creep compliance of greater  
20 than  $1 \times 10^{-6}$  cm<sup>2</sup>/dyne as described in Handbook of Pressure Sensitive Adhesive Technology, Donatas Satas (Ed.), 2<sup>nd</sup> Edition, p. 172, Van Nostrand Reinhold, New York, NY, 1989. Alternatively, since modulus is, to a first approximation, the inverse of creep compliance, pressure sensitive adhesives may be defined as adhesives having a Young's modulus of less than  $1 \times 10^6$  dynes/cm<sup>2</sup>. Another  
25 well known means of identifying a pressure sensitive adhesive is that it is aggressively and permanently tacky at room temperature and firmly adheres to a variety of dissimilar surfaces upon mere contact without the need of more than finger or hand pressure, and which may be removed from smooth surfaces without leaving a residue as described in Test Methods for Pressure Sensitive  
30 Adhesive Tapes, Pressure Sensitive Tape Council, (1996). Another suitable definition of a suitable pressure sensitive adhesive is that it preferably has a room temperature storage modulus within the area defined by the following points as

plotted on a graph of modulus versus frequency at 25°C: a range of moduli from approximately  $2 \times 10^5$  to  $4 \times 10^5$  dynes/cm<sup>2</sup> at a frequency of approximately 0.1 radian/second (0.017 Hz), and a range of moduli from approximately  $2 \times 10^6$  to  $8 \times 10^6$  dynes/cm<sup>2</sup> at a frequency of approximately 100 radians/second (17 Hz) (for example see Figure 8-16 on p. 173 of Handbook of Pressure Sensitive Adhesive Technology, Donatas Satas (Ed.), 2<sup>nd</sup> Edition, Van Nostrand Rheinhold, New York, 1989). Any of these methods of identifying a pressure sensitive adhesive may be used to identify suitable pressure sensitive adhesives for use in the methods of the present invention.

Furthermore, the pressure sensitive adhesive layer of the adhesive articles of the present invention can be a single pressure sensitive adhesive or it can be a combination of two or more pressure sensitive adhesives. Suitable adhesives are inherently stretchy, as in styrene block copolymers, or they can be reinforced to increase cohesive strength and stretchability.

The adhesive articles of the present invention include a continuous layer or a discontinuous layer (e.g., porous layer) of a stretch removable pressure sensitive adhesive. This may result from solvent coating, screen printing, roller printing, melt spraying, stripe coating, or laminating processes, for example. Porosity can also occur by perforating a continuous adhesive layer. An adhesive layer can have a wide variety of thicknesses so long as it possesses pressure sensitive adhesive characteristics, and preferably, stretch removable pressure sensitive adhesive characteristics, with thicknesses preferably ranging from about 10 micrometers (i.e., microns) to about 1000 micrometers.

The pressure sensitive adhesive can be in the form of fibers intimately entangled each with the other in the form of a coherent breathable fibrous nonwoven adhesive web. Suitable nonwoven webs can be formed as melt blown microfiber webs using the apparatus discussed, for example, in Wentz, Van A., "Superfine Thermoplastic Fibers," Industrial Engineering Chemistry, Vol. 48, pages 1342-1346, Wentz, Van A. et al., "Manufacture of Superfine Organic Fibers," Report No. 4364 of the Naval Research Laboratories, published May 25, 1954, and in U.S. Pat Nos. 3,849,241 (Butin et al.), 3,825,379 (Lohkamp et al.), and others. These microfine fibers are termed melt blown fibers or blown

microfibers (BMF) and are generally substantially continuous and form into a coherent web between the exit die orifice and a collecting surface by entanglement of the microfibers due in part to the turbulent airstream in which the fibers are entrained. Other conventional melt spinning type processes, such as spunbond processes where the fibers are collected in a web form immediately upon fiber formation, can also be used to form the adhesive layer. Generally, the fibers are 100 microns or less in diameter when formed by melt spinning type processes, preferably 50 microns or less. The fibers, if formed by the melt blown process, can be produced as described in U.S. Pat. Nos. 5,176,952 (Joseph et al.); 5,232,770 (Joseph); 5,238,733 (Joseph et al.); 5,258,220 (Joseph); or 5,248,455 (Joseph et al.). The fibers can also be produced by a spunbond process as are disclosed in U.S. Pat. Nos. 5,695,868 (McCormach); 5,336,552 (Strack et al.); 5,545,464 (Stokes); 5,382,400; 5,512,358 (Shawyer et al.); or 5,498,463 (McDowall et al.).

Pressure sensitive adhesives useful in the present invention include, for example, those based on natural rubbers, synthetic rubbers, styrene block copolymers, polyvinyl ethers, poly(meth)acrylates (including both polyacrylates and polymethacrylates), polyolefins, and silicones. The pressure sensitive adhesive may be inherently tacky. If desired, tackifiers may be added to a base material to form the pressure sensitive adhesive. Useful tackifiers include, for example, rosin ester resins, aromatic hydrocarbon resins, aliphatic hydrocarbon resins, and terpene resins. Other materials can be added for special purposes, including, for example, oils, plasticizers, antioxidants, ultraviolet ("UV") stabilizers, hydrogenated butyl rubber, pigments, and curing agents.

Suitable stretchable block copolymers would include those formed using a tackified elastomer where a preferred elastomer is an A-B-A type block copolymer wherein the A blocks and B blocks are configured in linear, radial, or star configurations. The A block is formed of a mono-alkenylarene (preferably polystyrene) block having a molecular weight of about 4000 to about 50,000. The A block content is preferably about 10 weight percent to about 50 weight percent. Other suitable A blocks may be formed from alpha-methylstyrene, t-butyl-styrene and other ring-alkylated styrenes, as well as mixtures thereof. The

B block is formed of an elastomeric conjugated diene, generally polyisoprene, polybutadiene or copolymers thereof having an average molecular weight from about 5000 to about 500,000. The B block dienes can also be hydrogenated. The B block content is preferably about 90 percent to about 50 percent of the block copolymer. The tackifying components for the stretchable block copolymers generally are solid tackifying resins, liquid tackifiers, plasticizers, or mixtures thereof. Suitable liquid tackifiers or plasticizers for use in the adhesive polymer include naphthenic oils, paraffin oils, aromatic oils, mineral oils or low molecular weight rosin esters, polyterpenes, and C-5 resins.

In a preferred embodiment, the pressure sensitive adhesive is based on poly(meth)acrylates (e.g., a polymethacrylic or polyacrylic pressure sensitive adhesive). Poly(meth)acrylic pressure sensitive adhesives are derived from, for example, at least one alkyl ester monomer such as, for example, isooctyl acrylate, isononyl acrylate, 2-methyl-butyl acrylate, 2-ethyl-hexyl acrylate, and n-butyl acrylate; and an optional co-monomer component such as, for example, (meth)acrylic acid, vinyl acetate, N-vinyl pyrrolidone, (meth)acrylate, (meth)acrylamide, a vinyl ester, a fumarate, a styrene macromer, or combinations thereof. Preferably, the poly(meth)acrylic pressure sensitive adhesive is derived from about 0 to about 20 weight percent of acrylic acid and about 100 weight percent to about 80 weight percent of at least one of isooctyl acrylate, 2-ethyl-hexyl acrylate or n-butyl acrylate composition, preferably isooctyl acrylate. A particularly preferred embodiment for the present invention is derived from about 2 weight percent to about 10 weight percent acrylic acid, about 90 weight percent to about 98 weight percent of isooctyl acrylate, and about 2 weight percent to about 6 weight percent styrene macromer.

The poly(meth)acrylate pressure sensitive adhesives can be synthesized by a variety of free-radical polymerization processes, including solution, radiation, bulk, dispersion, emulsion, and suspension polymerization processes. Bulk polymerization methods, such as the continuous free radical polymerization method described in U.S. Pat. Nos. 4,619,979 (Kotnor et al.) or 4,843,134 (Kotnor et al.), the essentially adiabatic polymerization methods using a batch reactor described in U.S. Pat. No. 5,637,646 (Ellis), and the methods described



for polymerizing packaged pre-adhesive compositions described in International Patent Application No. WO 96/07522 (Hamer et al.) may also be utilized.

The poly(meth)acrylate pressure sensitive adhesive of the present invention can include conventional additives such as tackifiers (wood rosin, polyesters, etc.), plasticizers, flow modifiers, neutralizing agents, stabilizers, antioxidants, fillers, colorants, and the like. Initiators that are not copolymerizable with the monomers used to prepare the (meth)acrylate copolymer can also be used to enhance the rate of polymerization and/or crosslinking. These additives are incorporated in amounts that do not materially adversely affect the desired properties of the pressure sensitive adhesives. Typically, they can be mixed into these systems in amounts of about 0.05 weight percent to about 25 weight percent, based on the total weight of the composition.

#### **Pressure Sensitive Adhesive Reinforcing Material**

In a preferred embodiment, the pressure sensitive adhesive is reinforced to increase the internal strength of the adhesive, and hence, its stretchability. This can be accomplished through the use of chemical or physical crosslinking, the addition of a second polymeric component having a higher glass transition temperature, or the addition of nonpolymeric fillers (e.g., calcium carbonate, clay, zinc oxide) or the addition of fibers into the pressure sensitive adhesive. Suitable reinforced adhesives are disclosed in International Publication Nos. WO 97/23577 (Hyde et al.) and WO 96/25469 (Hyde et al.), U.S. Pat. No. 6,045,895 (Hyde et al.), and in Applicants' Assignee's copending U.S. Patent Application Serial No. 09/764,478, entitled "Pressure Sensitive Adhesives and a Fibrous Reinforcing Material," filed on even date herewith.

Preferably, the reinforced pressure sensitive adhesive has a yield strength of no less than about 0.1 MPa when measured according to ASTM D 882-97 at a crosshead speed of 12 inches/minute (30 centimeters/minute). In specific embodiments, the yield strength is no less than about 0.2 MPa when measured according to ASTM D 882-97 at a crosshead speed of 12 inches/minute (30 centimeters/minute). Additionally, the reinforced pressure sensitive adhesive

(i.e., reinforced pressure sensitive adhesive composition) has a tensile strength of at least about 150% of the yield strength when measured according to ASTM D 882-97 at a crosshead speed of 12 inches/minute (30 centimeters/minute).

5 In certain embodiments of the preferred reinforced pressure sensitive adhesive, the tensile strength is about 0.7 MPa or greater when measured according to ASTM D 882-97 at a crosshead speed of 12 inches/minute (30 centimeters/minute). In specific embodiments of the preferred reinforced pressure sensitive adhesive, the tensile strength is about 0.8 MPa or greater when measured according to ASTM D 882-97 at a crosshead speed of 12  
10 inches/minute (30 centimeters/minute). The adhesive composition may have a tensile strength of at least about two times greater than the tensile strength of the pressure sensitive adhesive alone when measured according to ASTM D 882-97 at a crosshead speed of 12 inches/minute (30 centimeters/minute).

For preferred embodiments, the elongation at break for the reinforced  
15 pressure sensitive adhesive composition is at least about 50% when measured according to ASTM D 882-97 at a crosshead speed of 12 inches/minute (30 centimeters/minute), preferably more than about 200%, and may be higher than about 300%. In some embodiments the elongation at break is in excess of about 800%.

20 Additionally, in preferred embodiments, the amount of force required to remove the adhesive composition from a polypropylene substrate at an angle of between 15° and 35°, is less than about 20 Newtons/decimeter. This low removal force permits facile removal of the adhesive composition from a substrate. In certain embodiments, the force necessary to remove the adhesive  
25 composition from a substrate at such an angle is as low as about 7 Newtons/decimeter.

Various reinforcing materials may be used in the pressure sensitive adhesive. In preferred embodiments, the reinforcing material is a polymer. In specific embodiments, the reinforcing material is elastomeric. Preferably, the  
30 reinforcing material is a semi-crystalline polymer. A semi-crystalline polymer is one having both amorphous and crystalline domains. Many specific embodiments incorporate semi-crystalline polymers, such as polycaprolactone

(PCL), polybutene (PB), copolymers derived from ethylene and at least one other alpha-olefin monomer (e.g., poly(ethylene-co-1-alkene) and poly(ethylene-co-1-alkene-co-1-alkene)), ultra low density polyethylene (e.g., ATTANE 4202 commercially available from Dow Chemical Co.), linear low  
5 density polyethylene (e.g., LL-3003, ECD-125, 377D60, 369G09, 363C32, 361C33, 357C32, 350D65, 350D64, 350D60, LL-3013, and LL-3001 commercially available from Exxon Mobil Corp.) or combinations thereof.

Preferred reinforcing materials have a yield strength of less than about 20 MPa. The tensile strength of the reinforcing material with respect to its yield  
10 strength is preferably about 150% of the yield strength. These values are measured using ASTM D 882-97 at a crosshead speed of 12 inches/minute (30 centimeters/minute).

The reinforcing material preferably has a melting point above the use temperature of the adhesive composition. Similarly, the reinforcing material  
15 should have a melting point above the storage temperature of the adhesive composition or any article manufactured with the adhesive composition. Both the use temperature and the storage temperature should not exceed the decomposition temperature of the pressure sensitive adhesive. In certain embodiments, the reinforcing material has a melting point of at least 70°C. All  
20 temperatures are related as being measurable by differential scanning calorimetry ("DSC").

It is particularly desirable for the reinforcing material to have a melt viscosity similar to the melt viscosity of the pressure sensitive adhesive at the processing temperature of the method of this invention. In specific  
25 embodiments, the ratio of the reinforcing material melt viscosity to the pressure sensitive adhesive melt viscosity at the processing temperature is less than about 3, preferably less than about 1.5. In preferred embodiments, the ratio is between about 0.5 and about 1.2 depending on specific extrusion parameters (e.g. shear rate, screw speed, temperature). Melt viscosity is measurable as  
30 understood by one skilled in the art using a capillary viscometer.

The reinforcing material is preferably immiscible (i.e., remains in a separate phase) in the pressure sensitive adhesive during mixing so that the

reinforcing material can be substantially uniformly dispersed (i.e., distributed) in the pressure sensitive adhesive. In specific embodiments, during mixing, the reinforcing material is in the form of substantially spherical particles having an average diameter less than about 20 micrometers, generally less than about 10  
5 micrometers.

In preferred embodiments, the reinforcing material exists as substantially continuous fibers in the adhesive composition. Specifically, according to one aspect of the invention, the fibers are unbroken for at least about 0.5 centimeter in the machine direction of the pressure sensitive adhesive  
10 matrix, preferably about 2 to about 5 centimeters and more preferably about 8 centimeters. According to another aspect of the invention, the substantially continuous fibers generally have a maximum diameter of about 0.05 micrometer to about 5 micrometers, preferably from about 0.1 micrometer to about 1 micrometer. According to another aspect of the invention, the aspect  
15 ratio (i.e. the ratio of the length to the diameter) of the substantially continuous fibers is greater than about 1000.

Such preferred reinforced pressure sensitive adhesives are further described in Applicants' Assignee's copending U.S. Patent Application Serial No. 09/764,478, entitled "Pressure Sensitive Adhesives and a Fibrous  
20 Reinforcing Material," filed on even date herewith.

### **Backing**

A wide variety of materials can be used to form the backing. The backing  
25 can be tearable or nontearable, elastic or inelastic, stretchable or nonstretchable, porous or nonporous. Backings can be in the form of single or multi-layer films, nonwoven films, porous films, foam-like films, and combinations of the foregoing. Backings can also be prepared from filled materials, such as, for example, filled films (e.g., calcium carbonate filled polyolefins).

30 Film backings can be made by any known method of film forming, such as, for example, extrusion, coextrusion, solvent casting, foaming, nonwoven technology, and the like. A backing can have a wide variety of thicknesses so long as it possesses sufficient integrity to be processable and, preferably, capable

of forming tabs or having tabs attached thereto, with thicknesses preferably ranging from about 10 micrometers (i.e., microns) to about 250 micrometers.

Webs made from natural or synthetic fibers or mixtures thereof can be used. Woven or nonwoven materials can be employed, with nonwoven materials  
5 being preferred for most applications. Melt-blown or spunbond techniques can be employed to make such nonwoven webs. Nonwoven webs can also be prepared on a Rando Webber (Rando Corporation, Macedon, NY) air-laying machine or on a carding machine.

If the backing substrate is in the form of a laminate, additional  
10 components could be used, such as absorbent layers (e.g., gauze pads) for adhesive bandage products, or the like. If absorbent layers are used, they are typically thin, coherent, conformable, and able to flex and not interfere with the stretch removable characteristics of the articles, although they can be stretchable or not.

15 If a laminate, there may be one or more additional layers, which can be a breathable, liquid impervious film. Typically this film is the outermost (i.e., top) layer. Examples of film materials include polyurethanes, polyolefins, metallocene polyolefins, polyesters, polyamides, polyetheresters, and A-B-A block copolymers, such as KRATON copolymers available from Shell Chemical  
20 Co. Preferably, the outermost layer is a film that is substantially impervious to fluids, such as could arise from the external environment, yet permit passage of moisture vapor, such that the adhesive article is breathable (typically, having a moisture vapor transmission rate (MVTR) of at least about 500 g/m<sup>2</sup>/day).

The backing can optionally include fibers, which may be absorbent or  
25 nonabsorbent, and typically they are non-water absorptive. The fiber structures useful in the backing substrate of the present invention can include a multilayer configuration, a coated configuration, and a solid homogeneous configuration. Suitable multilayer fibers preferably have cores and outer layers composed of one or more polymers selected from polyolefins, polyesters, polyamides, and  
30 polyurethanes. Suitable coated fibers preferably have cores made of these polymers with coatings covalently bonded, embedded, or adhered thereto. The homogeneous fibers preferably are made of any of the polymers listed above.

Such fibers can be formed into backings using known weaving, knitting, or nonwoven techniques. Suitable such backings are disclosed, for example, in U.S. Pat. No. 5,613,942 (Lucast et al.).

5 In a preferred embodiment, the backing is formed from coherent multicomponent fibers having at least one pressure sensitive adhesive region or layer and at least one non-pressure sensitive adhesive region or layer as described in U.S. Pat. No. 6,107,219 (Joseph et al.). In another preferred embodiment, the backing is a melt blown polypropylene web available from Kimberly Clark, Irving, TX.

10 Typically, fibers forming a nonwoven tape backing are intimately entangled each with the other in the form of a coherent breathable fibrous nonwoven tape backing. Suitable nonwoven tape backings can be formed as melt blown microfiber webs using the apparatus discussed, for example, in Wente, Van A., "Superfine Thermoplastic Fibers," Industrial Engineering  
15 Chemistry, Vol. 48, pages 1342-1346, Wente, Van A. et al., "Manufacture of Superfine Organic Fibers," Report No. 4364 of the Naval Research Laboratories, published May 25, 1954, and in U.S. Pat Nos. 3,849,241 (Butin et al.), 3,825,379 (Lohkamp), and others. These microfines fibers are termed melt blown fibers or blown microfibers (BMF) and are generally substantially continuous and form  
20 into a coherent web between the exit die orifice and a collecting surface by entanglement of the microfibers due in part to the turbulent airstream in which the fibers are entrained. Other conventional melt spinning type processes, such as spunbond processes where the fibers are collected in a web form immediately upon fiber formation, can also be used to form the invention nonwoven tape  
25 backing. Generally, the fibers are 100 microns or less in diameter when formed by melt spinning type processes, preferably 50 microns or less. The multicomponent fibers, if formed by the melt blown process, can be produced as described in U.S. Pat. Nos. 5,176,952 (Joseph et al.); 5,232,770 (Joseph); 5,238,733 (Joseph et al.); 5,258,220 (Joseph); or 5,248,455 (Joseph et al.). The  
30 multicomponent fiber can also be produced by a spunbond process as are disclosed in U.S. Pat. Nos. 5,695,868 (McCormach); 5,336,552 (Strack et al.);

5,545,464 (Stokes); 5,382,400; 5,512,358 (Shawyer et al.); or 5,498,463 (McDowall et al.).

In preferred embodiments of the present invention in which a stretch removable article can be prepared without a stretch removable adhesive, the backing is an elastic nonwoven web, as disclosed in U.S. Pat. No. 5,629,079 (Battles et al.). These elastic nonwoven webs include blown microfibers formed by extrusion of thermoplastic elastomers through a die, which produces fine, randomly oriented fibers. Several different constructions of webs are suitable for use in this embodiment of the invention. In multilayered blown microfibers, the elastic nonwoven web includes longitudinally layered melt-blown microfibers with layers of a low modulus or elastomeric materials and adjacent layers of heat bondable materials. In commingled blown microfibers, the elastic nonwoven web includes at least two different types of melt-blown microfibers. A first microfiber includes a low modulus or elastomeric material; a second microfiber includes a heat bondable material. In blown microfiber web having intertangled staple fiber, an elastomeric nonwoven web is produced using an elastomeric blown microfiber and a larger-diameter staple fibers. The elastomeric microfibers and staple fibers of the resulting web are generally randomly intermixed and intertangled. All three embodiments can be used in stretch removable articles of the present invention, particularly in embodiments in which the adhesive is not necessarily stretch removable.

Representative examples of materials suitable for the backing of the adhesive article of this invention include polyolefins, such as polyethylene, including high density polyethylene, low density polyethylene, linear low density polyethylene, and linear ultra low density polyethylene, polypropylene, and polybutylenes; vinyl copolymers, such as polyvinyl chlorides, both plasticized and unplasticized, and polyvinyl acetates; olefinic copolymers, such as ethylene/methacrylate copolymers, ethylene/vinyl acetate copolymers, acrylonitrile-butadiene-styrene copolymers, and ethylene/propylene copolymers; acrylic polymers and copolymers; polycaprolactones; and combinations of the foregoing. Mixtures or blends of any plastic or plastic and elastomeric materials such as polypropylene/polyethylene, polyurethane/polyolefin,

polyurethane/polycarbonate, polyurethane/polyester, can also be used.

Additionally, any nonstretchable material can be used for the tearable backings or for those with perforations, including paper and even metal. Preferred materials for the backing include polyurethane, polypropylene, ethylene vinyl acetate, or combinations thereof (e.g., blends, mixtures, etc.) in the form of melt blown fibers. Preferred materials for film backings include polycaprolactones and copolymers of ethylene/vinyl acetate and linear low density polyethylene.

The backing can have perforations or holes to provide porosity or for assisting in removing the adhesive articles or in delamination. These perforations may be in a variety of shapes (e.g., circular, rectangular, oval) and sizes and positioned in various predetermined locations depending on the desired break points upon removal of the adhesive article. For example, perforations can be located in the backing near a centrally located gauze pad so that pulling on the gauze pad causes the backing to break, and the pad/backing/adhesive act as a tab to remove the remainder of the article by stretching. Such perforations can be made using well known techniques. They can be partially or completely occluded, closed, or masked until stretching of the article. The perforations are typically of a size that does not allow the adhesive to extend through and impart tackiness to the opposite surface on which the adhesive is disposed. Preferably, the perforations are at least about 0.0025 centimeter (cm) in diameter, more preferably, at least about 0.01 cm, and most preferably, at least about 0.02 cm in diameter. Preferably, the perforations are not greater than about 0.04 cm in diameter.

Referring to FIGS. 1-3, an adhesive construction (e.g., tape) 10 of this invention includes a backing 14 bearing on at least one major surface thereof a pressure sensitive adhesive layer 12, which is preferably stretch removable. As shown in FIG. 1, tape 10 is adhered to substrate 16 and includes an optional gauze pad 18, for example, in the form of a wound dressing. As shown in FIG. 1, the backing is optionally perforated along lines 19. If desired, in this and other embodiments described herein the adhesive and/or backing over the pad 18 need not necessarily be stretchy. Also, the gauze pad may or may not be stretchy.



As shown in FIG. 2, during removal, the tape 10 is stretched substantially parallel to the substrate 16 surface and the adhesive layer 12 elongates and stretch releases from the substrate 16 and delaminates from at least part of the backing 14. If the adhesive construction includes perforations 19 in the backing 14, the perforated backing can tear (i.e., break) (not shown in FIG. 2).

As shown in FIG. 3, if the backing 14 possesses perforations (previously located at the points of break 20 in the backing 14) near the pad 18, the backing 14 can break at both sides of the pad 18 on stretching the construction (for simplicity, delamination of the adhesive 12 from the backing 14 is not shown except at the break points 20) by applying a pulling force along the direction of line F on the region of the tape 10 that encompasses the pad 18, which could also include a tab as discussed in greater detail below. An alternative embodiment of such a construction would not necessarily have perforations but could be removed in a similar fashion.

An image, if desired, can be placed on the adhesive portion of the construction and will be made visible on breaking the backing and stretching (not shown).

### **Tabs**

The backings of the present invention may be equipped with tabs or handles in the form of grip ledges, folds, loops, and other devices to facilitate removal of the adhesive article (e.g., tape or wound dressing). The use of such tabs may be advantageous in obviating the need for prying (using a finger nail, for example) the end or center of an adhesive article from a surface prior to removal. Preferably, such tabs are located in a central portion of the backing (i.e., the center 80% of the length of a backing), and more preferably over the pad area if it is present.

The tabs can be in a variety of shapes and sizes. They can be made of a thin, highly flexible film that does not snag on environmental objects. The tabs may also be made by securing a ribbon of thin film or a thread under a bar of adhesive applied across the width of the backing. The tabs may also be formed from other parts of the backing, such as simply by making a fold in the backing

during manufacture, which can be done before or after application of the adhesive. If the tab is formed after the adhesive is applied to the backing, the tab can include a portion of the adhesive. Alternatively, the backing can be in the form of two pieces, optionally with overlapping ends, each of which have a nonadhesive portion, i.e., a portion free of exposed adhesive. These ends can be free of adhesive or have a piece of liner covering the adhesive at the ends.

The preferred centrally located tabs are particularly advantageous for the removal of a wound dressing as they can reduce the pain of removal and allow careful avoidance of damage to the wounded area during removal. Such tabs are preferably pulled at about 45° up to right angles (i.e., normal) to the substrate and surface to which the adhesive article is attached, although this angle may be reduced to near zero (i.e., substantially in the plane of the adhesive bond) if the surface is not rigid (e.g., skin). Accordingly, a gauze pad of a wound dressing, for example, can clear the delicate central area of the wound first and typically can be prevented from scraping over the wound. Furthermore, the gentle pressures that result from releasing the dressing act to hold the wound shut. Advantageously, the tearing effect on the wound of customary dressing removal is typically avoided. The articles and methods of removal that utilize tabs are advantageous in that they prevent digging under one end of the adhesive tape “wings” of a wound dressing and peeling from one end to the other. Pain typically results from digging out hair or skin with the fingernails, from tearing out hair stuck to the dressing adhesive during the peeling operation, and from tearing at the edges of the wound.

Desirably, unpleasant and possibly septic or virus-containing wound exudate can be contained and concealed from view by the pinching action of removal that results in the dressing ending up folded in half widthwise and adhered together with the exudate inside. This removal action can be done with one hand. The method is quick, clean, gentle, and generally painless, and thus especially suited for children and the elderly.

The tab (i.e., handle) is preferably designed such that snagging or picking does not remove the adhesive article prematurely, for example, and that it indicates which direction to pull to get the benefit of the invention. Preferably,

the tab is secured permanently in one area and temporarily in one or more other areas or is made *in situ* from other parts of the dressing during manufacture. The temporary securement of part of the tab is to prevent snagging and hooking. The tab may be colored to show where it is, and it may be printed with an arrow showing which way to pull it to get the painless removal benefit. Further directions could be on the wrapper or the box containing the medical articles.

Depending on the application, the tabs of the adhesive articles can be placed at different locations for advantageous removal. For example, in one preferred embodiment, a medical article is designed for adhesion to relatively loose skin, such as on the top of the forearm. In this embodiment, the point of attachment of the tab is generally symmetrically straddling the center gauze pad and centered in the long dimension of the dressing. In another preferred embodiment a medical article is designed for adhesion to skin that is relatively taut, as on the palm of the hand. In this embodiment, the point of attachment of the tab is preferably centered across the width of the pad, but located off center relative to the length of the article (although still within the central portion of the adhesive article).

Referring to FIGS. 4-9, various preferred embodiments of a wound dressing (e.g., approximately 1.9 cm by 7.6 cm) are shown that include a backing (e.g., PGI 6012 Comfort Silk Film from Polymer Group, Inc., Gainesville, GA), an adhesive layer (e.g., Adhesive A described in the Examples Section), and central gauze pad material (e.g., approximately 1.3 cm by 2.5 cm of a pad of an 108 gram/square meter absorbent rayon nonwoven laminated on both sides with P530S DELNET commercially available from Applied Extrusion Technologies, Middletown, DE). Each embodiment demonstrates a different tab construction.

Referring to FIG. 4, the backing 40 of a preferred wound dressing is shown with a gauze pad 42 positioned on the opposite side of the backing 40 (shown by the hatched lines) and a tab 44. The tab 44 could be a string, thread, or polymer ribbon film (e.g., mercerized sewing thread) fixed to the backing 40 on the surface opposite the pad 42 with a bead of adhesive 46 (e.g., epoxy), preferably reaching from one side of the backing to the other across the narrow dimension (i.e., the width). The thread-shaped tab 44 is shown attached at the

center along the length of the backing 40. Alternatively, it can be attached off center along the length of the backing 40, if desired.

Referring to FIG. 5, the tab 54 could be made of thin polyester or other film shaped like a "T" and fixed across the width of the backing 50 with adhesive under or incorporating the top of the "T." The T shown in Fig. 5 is made of 0.5-mil (12.5-micron) polyester film and has a distance across portion 55 (or crossbar) of the T of 13 mm and the widths of the arms are 2 mm each. The portion 55 of the T is approximately centered on the long dimension of the pad and is adhered to the backing 50 with an adhesive (e.g., an adhesive commercially available from 3M Company, St. Paul, MN, under the trade designation SUPER STRENGTH ADHESIVE) to form a permanent bond. Alternatively, the portion 55 of the T could be attached off center along the length of the backing 50, if desired. The portion 56 of the T is variable in length, but is preferably at least about 7 mm for ease of grasping, and is temporarily anchored to the backing 50 with an adhesive (e.g., an adhesive commercially available from 3M Company under the trade designation SCOTCH RESTICKABLE ADHESIVE glue stick) to form a nonpermanent bond.

Referring to FIG. 6, the tab 64 is a half loop (rectangular or rounded) of material (e.g., thread) the open ends of which are fixed to the backing 60 midway along its length such that the resulting loop straddles an underlying gauze pad 62 symmetrically. Alternatively, the half loop-shaped tab 64 can be attached off center along the length of the backing 60, if desired. In this embodiment, the material of the tab 64 is thread and can be permanently adhered to the backing between the gauze pad 62 and the backing 60 (e.g., using 3M SUPER STRENGTH ADHESIVE) in a manner such that the thread would not touch the wound (as shown by hatched line 63). The half loop-shaped tab 64 can be temporarily adhered to the backing 60 (e.g., using SCOTCH RESTICKABLE ADHESIVE glue stick) until the adhesive article is to be removed. Passing these loop-shaped tabs between the pad and the backing could help distribute the load when fragile backings and adhesives are used. They could be completely impregnated with adhesive when used in this way to avoid wicking wound exudate out from under the dressing.

Referring to FIG. 7, the tab 74 is a rectangular or rounded half loop of material (e.g., 0.5-mil (12.5-micron) polyester film) the open ends of which are fixed to the backing 70 across its width so that the resulting loop straddles the underlying gauze pad 72, but is located at one end of the pad 72. The ends 73 (shaded) of the tab 74 are permanently adhered to the backing 70 (e.g., using 3M SUPER STRENGTH ADHESIVE) and the remainder can be temporarily adhered to the backing 70 (e.g., using SCOTCH RESTICKABLE ADHESIVE glue stick) until the adhesive article is to be removed.

Referring to FIG. 8, the tab 84 is a rectangular shaped film (e.g., 0.5-mil (12.5-micron) polyester film) surrounding the underlying gauze pad 82. The tab 84 is permanently adhered along one edge 83 (shaded edge) (e.g., using 3M SUPER STRENGTH ADHESIVE) so one part of the rectangular-shaped tab 84 sticks to the backing while the other part lifts up. The tab could be a part of the backing cut to form a half moon shaped tab, for example, and easily picked up with a fingernail.

Referring to FIG. 9, a tab 94 is shown in cross-section that is formed from the backing 90, as can be done by making a fold in the backing during manufacture, either before or after application of the adhesive. In this embodiment the fold was made after the adhesive 98 was applied, thereby resulting in adhesive within the tab 94.

FIGS. 10 and 11 show two wound dressing constructions made from a tape construction as described in Example 1C in the Examples Section, the central pad 106 material being an 108 gram/square meter absorbent rayon nonwoven laminated on both sides with P530S DELNET commercially available from Applied Extrusion Technologies, Middletown, DE. Tabs 102 and 103 are 3 mm wide oriented polypropylene film commercially available as PROPORE KN9400 film from 3M Company, St. Paul, MN.

In FIGS. 10 and 11 the backing can be in the form of two adhesive-coated pieces 100 and 101 with ends that have a nonadhesive portion in the form of tabs 102 and 103 that can overlap each other over the gauze pad 106 (as shown in FIG. 10) or not (as shown in FIG. 11). Each end forms a tab 102 and 103 for the respective backing piece 100 and 101. Referring to the embodiment shown in

FIG. 10, for example, to remove the article, tab 102 is first pulled outward (i.e., away from tab 103) at an angle of about  $10^\circ$  allowing the adhesive to release from backing piece 101 over the pad 106, while backing piece 100 is removed from the skin. After removal of backing piece 100, the pad 106 can be folded under to form a handle for removal of backing piece 101 by stretching in a direction toward the area of removed backing piece 100. Alternatively, tab 103 can be grasped instead of folding the pad 106.

These descriptions of tab forms are not intended to be complete as other tab constructions could be used to pull up in the central position of the adhesive article.

For certain of the preferred wound dressings described above, it is useful to use a stretchable gauze pad. A stretchable gauze pad stays adhered to the deformable tape construction better than a non-stretchy pad, and the stretch removal behavior is communicated from one adhesive wing of the dressing to the other when a stretchy pad is used. This is especially true when an island pad occupying a large fraction of the width of the dressing is used.

#### **Absorbent Particles and Other Additives**

Wet skin adhesion characteristics of the adhesive articles of the present invention can be provided by an absorbent particulate material, typically in the form of a powder or larger particles, including fibers, herein referred to generally as particulate material or particles. The particles can be of any desired shape, such as round, flake-like, elongated, or irregular, for example. The particulate matter can be distributed uniformly throughout the backing substrate or can be coated onto either major surface of the backing. A sufficient amount of absorbent particulate material is present in or on the backing substrate to provide the desired levels of wet skin adhesion.

The particulate material is sufficiently water absorptive to provide articles having sufficient wet skin adhesion, preferably, at least about 20 g/2.5 cm (0.08 N/cm). Preferably, the particulate material is superabsorbent. Suitable superabsorbent particles are made from polymers that are capable of absorbing at least about 50 times their weight of water. Suitable superabsorbent particulate

material can be prepared from carboxymethylcellulose and its sodium and potassium salts, hydroxymethylcellulose, hydroxyethylcellulose, poly(acrylamide), poly(acrylic acid) and its sodium and potassium salts, alginates, and starch-graft copolymers such as those of acrylates and acrylamides and their salts. Examples of such materials are disclosed in U.S. Pat. No. 5,064,653 (Sessions et al.). Although superabsorbent particles are preferred, other absorbent particles can be used if desired, such as gelatins, polysaccharides, gums including pectin, guar gum, xantham gum, and karaya gum.

10        Examples of other additives that can be included into the backing and/or adhesive include odor absorbers such as activated carbon, medicaments such as chlorhexidine gluconate, biologically active agents, cosmetic agents, and the like, which can be in particulate form or incorporated into encapsulating agents.

15        The adhesive and/or backing can also include dye-based or pigment-based inks in the form of an image (e.g., text or picture). Preferably, the adhesive layer includes an image that becomes visible upon removal and delamination. The image can be applied using a wide variety of conventional techniques, such as ink jet printing, electrophotography, screen printing, etc.

20

## EXAMPLES

The objects, features, and advantages of the present invention illustrated in the following examples, which incorporate particular materials and amounts, should not be construed to unduly limit this invention. All materials are commercially available unless otherwise stated or apparent. All parts, percentages, ratios, etc., in the examples are by weight unless otherwise indicated.

## GLOSSARY

### Adhesives

30    **Adhesive A**    Fibers-containing polyacrylate pressure sensitive adhesive (PSA) (5-mil (0.13 -mm) thick) prepared as described in Example 20 of

Applicants' Assignee's copending U.S. Patent Application Serial No. 09/764,478, entitled "Pressure Sensitive Adhesives and a Fibrous Reinforcing Material," filed on even date herewith.

- 5     **Adhesive B**     Tackified KRATON PSA comprising 50 weight % KRATON 1107 (a styrene-isoprene copolymer thermoplastic elastomer, Shell Chemical Co., Houston, TX) and 50 weight % ESCOREZ 1310 tackifier (an aliphatic resin, Exxon Chemical Co., Houston, TX); hot-melt coated at an 8-mil (0.2-mm) thickness on a  
10                             standard release liner.
- 15             **Adhesive C**     A PSA blend (75/25) of an isooctyl acrylate/acrylic acid PSA and KRATON D1107P (styrene-isoprene-styrene block copolymer) prepared as described in Example 1 of International Publication No. WO 96/25469 (Hyde et al.). The PSA was extruded to a  
                              thickness of 0.12 mm.
- 20             **Adhesive D**     A multi-layer co-extruded PSA material made from 61 layers of alternating ABABA...(where A is an acrylic PSA and B is a hydrophilic polyurethane) as described in Example 11 of U.S. Pat. No. 6,045,895 (Hyde et al.). Two 0.06-mm thick extruded layers of this PSA material were laminated together to provide Adhesive D (0.12-mm thick).
- 25             **Adhesive E**     A multi-layer co-extruded PSA material made from 61 layers of alternating ABABA...(where A is an acrylic PSA and B is a polyether-block-amide) as described in Example 12 of U.S. Pat. No. 6,045,895 (Hyde et al.). Two 0.06-mm thick extruded layers of this PSA material were laminated together to provide Adhesive  
30                             E (0.12-mm thick).



**Adhesive F** Fiber-containing polyacrylate pressure sensitive adhesive prepared as described in Example 28 of Applicants' Assignee's copending U.S. Patent Application Serial No. 09/764,478, entitled "Pressure Sensitive Adhesives and a Fibrous Reinforcing Material," filed on even date herewith.

5

**Backings**

**Polyurethane** Melt-blown nonwoven fibrous web comprised of three-layer polymeric fibers having a center layer of blended polyethylene and KRATON PSA, and outer layers of polyurethane; prepared as described for Backing Sample 16 in U.S. Pat. No. 6,107,219 (Joseph et al.); typically represents an elastic, non-tearable backing.

10

**Paper** Hammermill Laserprint paper (0.11-mm thick), Product No. 00460-4, International Paper, Memphis, TN); typically represents a non-stretchable, tearable backing.

15

**Polyethylene** Melt-blown nonwoven polyethylene (0.04-mm thick, Style No. TM07-27-98-02, Trans Web LLC, Vineland, NJ); typically represents a stretchable, tearable backing.

20

**Polypropylene** Melt-blown nonwoven polypropylene (basis weight 20 g/m<sup>2</sup>, Kimberly-Clark, Irving, TX); typically represents a non-stretchable, tearable backing.

25

**Film** Polymer film comprising 60% ethylene/vinyl acetate copolymer, 35% linear low density polyethylene, 5% stabilizers and other additives (PGI Product No. 6012, Polymer Group, Inc., Gainesville, GA); film had a basis weight of 1.15 oz/yd<sup>2</sup> (27 g/m<sup>2</sup>), was 5-mils (0.13-mm) thick, and had oval-shaped holes (approximately 0.2-mm width x 0.3-mm length in the greatest

30

5 dimensions) with the length dimension of the oval holes oriented parallel to the machine direction of the film. The film had about 530 holes/cm<sup>2</sup> arranged in a pattern of staggered lines. One side of the film was "smooth" (microetched/embossed for smoothness) and the other side was "rough" (side that had material pushed out from forming the holes).

## TEST PROTOCOLS

### Tape Removal Method

10 A tape sample having a laminated backing/adhesive construction was adhered with thumb pressure onto a mirror-finished steel plate with about 1-cm length of the sample extending over the end of the plate. The over-extending portion of the sample was finger-grasped and stretched in the plane of the adhesive-backing interface at a rate of about 152 cm/min. Upon stretching, the  
15 adhesive released from the plate surface. The tape construction was visually checked to determine, over the area of the sample that was removed from the steel plate by stretching, whether at least 50% of the area of the backing was separated from the adhesive during stretch removal. In these examples, the tape sample was considered to have delaminated if at least 50% of the backing layer  
20 area had separated from the adhesive layer. (The area of the backing can change during the stretch removal process; the new area of the backing was considered in determining whether delamination had occurred to an extent of at least 50%.)

25

## EXAMPLES 1A-6C and COMPARATIVE EXAMPLE 1

### Stretch Removable First Aid Dressings

First Aid Dressing (FAD) materials were made by laminating an 8.5-cm x  
30 12.5-cm sheet of backing to an 8.5-cm x 12.5-cm sheet of adhesive. In all cases, the adhesive and backing were laminated using a Carver Laboratory Press, Model C (Fred Carver Inc., Subsidiary of Sterling, Inc., Menomonee Falls, WI)

with a 1000-lb (4450-N) force for 5 seconds at either room temperature (approximately 23°C), 70°C, or 100°C. The various FAD constructions (Examples 1A to 6C), including the specific backings and adhesives used (see Glossary), are provided in Table 1.

5 It was noted that the Polyurethane and Polyethylene nonwoven backings were both rougher on one side than the other due to the collection technique used during the melt-blown process. (For example, a nonwoven web collected on a smooth collector will be "smooth" on the side facing the collector and "rough" on the side facing the die.) For each of the Examples presented in Table 1 (1A-C,  
10 2A-C, 5A-C, and 6A-C), FAD samples were made with the adhesive laminated to both the "rough" and the "smooth" sides of the backings. No differences in evaluation results were attributed to whether the adhesive was laminated to "rough" or "smooth" sides of the backing.

In the case of the FAD constructions that contained the polyacrylate  
15 Adhesive A (Examples 1A-C, 3A-C, and 5A-C), the adhesive sheet was laminated to the backing in such a way that the FAD, when stretched for removal, was stretched parallel to the machine direction of the adhesive sheet.

In the case of Examples 1A-C and 2A-C, the Polyurethane backing was broken prior to lamination.

20 Comparative Example 1 (CE-1) was prepared by hot-melt coating the KRATON Adhesive B onto the Polyurethane backing at a thickness of 0.2 mm.

<b>Table 1</b>				
<b>Laminated Stretch Removable First Aid Dressings</b>				
<b>Ex.</b>	<b>Lamin. Temp. °C</b>	<b>Backing Layer</b>	<b>Adhesive Layer</b>	<b>Delamination on Removal</b>
1A	23	Polyurethane	Adhesive A	Yes

1B	70	Polyurethane	Adhesive A	Yes (Adhesive Layer Broke)
1C	100	Polyurethane	Adhesive A	No
2A	23	Polyurethane	Adhesive B	Yes
2B	70	Polyurethane	Adhesive B	No (Adhesive Layer Stretched w/ Backing)
2C	100	Polyurethane	Adhesive B	No
3A	23	Paper	Adhesive A	Yes
3B	70	Paper	Adhesive A	Yes
3C	100	Paper	Adhesive A	Yes (Adhesive Layer Broke)
4A	23	Paper	Adhesive B	Yes
4B	70	Paper	Adhesive B	Yes (Adhesive Layer Broke)
4C	100	Paper	Adhesive B	No
5A	23	Polyethylene	Adhesive A	Yes
5B	70	Polyethylene	Adhesive A	Yes
5C	100	Polyethylene	Adhesive A	No
6A	23	Polyethylene	Adhesive B	Yes
6B	70	Polyethylene	Adhesive B	Yes
6C	100	Polyethylene	Adhesive B	No
CE-1	NA*	Polyurethane	Adhesive B	No

\*Not Applicable; KRATON Adhesive B hot-melt coated onto the Polyurethane backing.

- 5 The laminated FAD materials were cut into 1.2-cm x 4.0-cm tape samples and evaluated for delamination during removal by stretching from a steel plate according to the Tape Removal Method described herein. Whether or not the FAD samples delaminated upon stretch and removal from the plate is indicated in Table 1.

In the case of Examples 1A-C and 2A-C that were constructed with a Polyurethane backing, the backing layer of the tape samples was cut at each end so that the adhesive layer, together with a portion of the backing that was cut, could be stretched. For all other Examples (3A-6C), the backing broke during stretching at least at the position extending over the end of the steel plate.

All of the tape samples that had been laminated at 23°C (1A, 2A, 3A, 4A, 5A, and 6A) were observed to delaminate when stretched and removed from the steel plate; all but one of the samples that had been laminated at 70°C (1B, 3B, 4B, 5B, and 6B) were observed to delaminate when stretched and removed; and only one of the samples that had been laminated at 100°C (3C) was observed to delaminate when stretched and removed. The Comparative Example (CE-1) tape sample did not delaminate when stretched and removed from the steel plate.

### EXAMPLES 7A-B

#### Stretch Removable First Aid Dressings

A FAD sample was made by laminating with thumb pressure at room temperature a strip (0.6-cm x 5.1-cm) of the perforated polymer Film backing (see Glossary) to a strip (0.6-cm x 5.1-cm) of the KRATON Adhesive B with the "smooth" side of the Film backing against the adhesive (Example 7A). Another FAD sample was made in the same manner, except with the "rough" side of the Film backing against the adhesive (Example 7B).

The laminated FAD samples were evaluated for delamination during removal by stretching from a steel plate according to the Tape Removal Method described herein. The Example 7B sample was observed to delaminate when stretched and removed from the steel plate, but there was no evidence of delamination when the Example 7A sample was stretched and removed.

### EXAMPLE 8

### **Stretch Removable First Aid Dressing**

The Polyurethane backing (see Glossary) was perforated with a metal die to provide parallel rows of holes separated by 3.8 cm. The holes were rectangular in shape (1.75-mm x 0.07-mm) and the space between holes within a row was 0.7 mm. The Polyurethane backing had one side rougher than the other due to the collection technique used during the melt-blown process.

A FAD sample was made by laminating with thumb pressure at room temperature a strip (2.54-cm x 7.6-cm) of the perforated Polyurethane backing to a strip (2.54-cm x 7.6-cm) of the KRATON Adhesive B with the "rough" side of the backing against the adhesive and with the rows of holes perpendicular to the long axis of the sample. A 1.8-cm x 2.5-cm gauze pad was attached to the adhesive layer in the center of the sample and the holes had been pre-cut such that the rows began 6 mm from each end of the sample.

The FAD sample was evaluated for delamination during removal by adhering the sample with finger pressure to the forearm of a human subject, waiting 10 minutes, and then removing by lifting and stretching the gauze pad at about a 90° angle to the plane of the forearm. Very little force was required to stretch the backing and to remove the sample painlessly from the skin and hair of the forearm. During stretching and removal, the backing was observed to break and to delaminate from the adhesive layer.

### **EXAMPLE 9**

#### **Stretch Removable First Aid Dressing**

The Paper backing (see Glossary) was perforated with a metal die to provide parallel rows of holes separated by 6.35 cm. The holes were rectangular in shape (1.75-mm x 0.07-mm) with the long sides of the holes oriented in the direction of the rows and the space between holes within a row was 0.7 mm.

A FAD sample was made by laminating with thumb pressure at room temperature a strip (2.54-cm x 7.6-cm) of the perforated Paper backing to a strip (2.54-cm x 7.6-cm) of the Polyacrylate Adhesive A with fibrils of the adhesive and the rows of holes perpendicular to the long axis of the sample. A 1.8-cm x 2.5-cm gauze pad was attached to the adhesive layer in the center of the sample

and the holes had been pre-cut such that the rows began 6 mm from each end of the sample.

The FAD sample was evaluated for delamination during removal by adhering the sample with finger pressure to the forearm of a human subject, waiting 10 minutes, and then removing by pulling one end of the sample and stretching the sample at about a 35° angle to the plane of the forearm. Very little force was required to stretch the backing and to remove the sample painlessly from the skin and hair of the forearm. During stretching and removal, the backing was observed to break and to delaminate from the adhesive layer.

10

### **EXAMPLE 10A-B**

#### **Stretch Removable First Aid Dressings**

FAD sample was made as described in Example 1A by laminating at room temperature a sheet of the Polyurethane backing to a sheet of Adhesive C with the "rough" side of the backing against the adhesive (Example 10A). Another FAD sample was prepared in the same manner except that the "smooth" side of the backing was against the adhesive (Example 10B). For both Examples 10A and 10B, the Polyurethane backing was perforated before lamination as described for the Paper backing in Example 9.

The laminated FAD samples were evaluated for delamination during removal by stretching from a steel plate according to the Tape Removal Method described herein. Both Examples 10A and 10B samples were observed to delaminate when stretched and removed from the steel plate

The FAD samples were also evaluated for delamination during removal by adhering each sample with finger pressure to the forearm of a human subject, waiting 10 minutes, and then removing by pulling one end of the sample and stretching the sample at about a 35° angle to the plane of the forearm. For both Examples 10A and 10B, very little force was required to stretch the backing and to remove the sample painlessly from the skin and hair of the forearm. During stretching and removal, the backing was observed to break and to delaminate from the adhesive layer.

**EXAMPLE 11****Stretch Removable First Aid Dressing**

A FAD sample was made as described in Example 10A, except that Adhesive D was used in place of Adhesive C. The sample was evaluated and the  
5 same results obtained as described in Example 10A.

**EXAMPLE 12****Stretch Removable First Aid Dressing**

A FAD sample was made as described in Example 10A, except that  
10 Adhesive E was used in place of Adhesive C. The sample was evaluated and the same results obtained as described in Example 10A.

**EXAMPLE 13****Stretch Removable First Aid Dressing**

15 A FAD sample was made by laminating with thumb pressure at room temperature a strip (2.54-cm x 7.6-cm) of the Polypropylene backing (see Glossary) to a strip (2.54-cm x 7.6-cm) of the Adhesive A. A 1.3-cm piece of the adhesive/backing laminate was gathered in the middle of the strip in such a way that a fold was made perpendicular to the greatest length of the strip. A 1.8-cm x  
20 2.5-cm gauze pad was attached to the adhesive layer in the center of the sample.

The FAD sample was evaluated for delamination during removal by adhering the sample with finger pressure to the forearm of a human subject, waiting 10 minutes, and then using the fold in the FAD as a handle, removing by lifting and stretching the gauze pad at about a 90° angle to the plane of the  
25 forearm. Very little force was required to stretch the backing and to remove the sample painlessly from the skin and hair of the forearm. During stretching and removal, the backing was observed to break and to delaminate from the adhesive layer.



**EXAMPLE 14****Stretch Removable First Aid Dressing**

5 A FAD sample having a center fold and a gauze pad was made as described in Example 13, except that the Polyurethane backing (see Glossary) was used in place of the Polypropylene backing. The sample was evaluated as described in Example 13. During stretching and removal, the backing was observed to delaminate from the adhesive layer.

**EXAMPLE 15****Stretch Removable First Aid Dressing**

10 A FAD sample having a center fold and a gauze pad was made as described in Example 13, except that Adhesive F was used in place of Adhesive A. The sample was evaluated and the same results obtained as described in Example 13.

15 The complete disclosures of the patents, patent documents, and publications cited herein are incorporated by reference in their entirety as if each were individually incorporated. Various modifications and alterations to this invention will become apparent to those skilled in the art without departing from the scope and spirit of this invention. It should be understood that this invention is not intended to be unduly limited by the illustrative embodiments and examples set forth herein and that such examples and embodiments are presented by way of example only with the scope of the invention intended to be limited only by the claims set forth herein as follows.

25

**What Is Claimed Is:**

1. A method of removing a medical article from skin, the method comprising:
  - 5 providing a medical article adhered to skin, wherein the medical article comprises a backing and a stretch removable pressure sensitive adhesive layer disposed thereon; and
  - stretching the medical article in an amount sufficient to delaminate the adhesive layer from the backing and remove the medical
  - 10 article from the skin.
2. The method of claim 1 wherein stretching the medical article comprises stretching it in a direction substantially parallel to the plane of the skin to which it is adhered.
- 15 3. The method of claim 1 wherein the backing and the adhesive layer are selected such that the stretchability of the adhesive layer is greater than that of the backing under the same tension.
- 20 4. The method of claim 3 wherein the stretchability at break of the adhesive layer is at least about 300%.
5. The method of claim 4 wherein the stretchability at break of the adhesive layer is no greater than about 800%.
- 25 6. The method of claim 3 wherein the stretchability at break of the adhesive layer is at least about 10% greater than that of the backing.
7. The method of claim 1 wherein the adhesive layer comprises a
- 30 poly(meth)acrylate.

8. The method of claim 1 wherein the adhesive layer comprises a reinforced adhesive.
9. The method of claim 8 wherein the adhesive layer comprises a fibrous reinforcing material.
10. The method of claim 9 wherein the adhesive layer comprises:  
a pressure sensitive adhesive matrix; and  
a fibrous reinforcing material within the pressure sensitive adhesive matrix;  
wherein the adhesive layer has a yield strength and a tensile strength, and wherein the tensile strength is about 0.7 MPa or greater, and at least about 150% of the yield strength.
11. The method of claim 10 wherein the pressure sensitive adhesive matrix comprises a polymer derived from at least one alkyl ester monomer selected from isooctyl acrylate, 2-ethyl-hexyl acrylate, and n-butyl acrylate, and at least one co-monomer selected from acrylic acid and acrylamide.
12. The method of claim 1 wherein the adhesive layer comprises an A-B-A block copolymer.
13. The method of claim 1 wherein the medical article is in the form of a wound dressing, surgical dressing, medical tape, athletic tape, or surgical drape.
14. The method of claim 1 wherein the medical article is in the form of a sensor, an electrode, or an ostomy appliance.
15. A method of removing a medical article from skin, the method comprising:

providing a medical article adhered to skin, wherein the medical article comprises a backing and a stretch removable pressure sensitive adhesive layer disposed thereon;

5 wherein the backing and the adhesive layer are selected such that the stretchability of the adhesive layer is greater than that of the backing under the same tension;

wherein the stretch removable pressure sensitive adhesive layer comprises:

10 a pressure sensitive adhesive matrix; and  
a fibrous reinforcing material within the pressure sensitive adhesive matrix;

and further wherein the adhesive layer has a yield strength and a tensile strength, and wherein the tensile strength is about 0.7 MPa or greater, and at least about 150% of the yield strength;  
15 and

stretching the medical article in an amount sufficient to delaminate the adhesive layer from the backing and remove the medical article from the skin.

20 16. A method of removing a medical article from skin, the method comprising:

providing a medical article adhered to skin, wherein the medical article comprises a backing and a stretch removable pressure sensitive adhesive layer disposed thereon;

25 wherein the backing and the adhesive layer are selected such that the stretchability of the adhesive layer is greater than that of the backing under the same tension;

wherein the stretch removable pressure sensitive adhesive layer comprises:

30 a pressure sensitive adhesive matrix comprising a polymer derived from at least one alkyl ester monomer selected from isooctyl acrylate, 2-ethyl-hexyl acrylate, and

n-butyl acrylate; and at least one co-monomer selected from acrylic acid and acrylamide; and

a fibrous reinforcing material within the pressure sensitive adhesive matrix;

5 and further wherein the adhesive layer has a yield strength and a tensile strength, and wherein the tensile strength is about 0.7 MPa or greater, and at least about 150% of the yield strength; and

10 stretching the medical article in a direction relative to the skin to which it is adhered sufficient to delaminate the adhesive layer from the backing and remove the medical article from the skin.

15 17. A medical article comprising a backing and a stretch removable pressure sensitive adhesive layer disposed thereon, wherein the backing and the adhesive layer are selected such that the stretchability of the adhesive layer is greater than that of the backing under the same tension and the adhesive layer and backing delaminate when removed from skin.

20 18. The medical article of claim 17 wherein the stretchability at break of the adhesive layer is at least about 300%.

19. The medical article of claim 17 wherein the stretchability at break of the adhesive layer is at least about 10% greater than that of the backing.

25 20. The medical article of claim 17 wherein the adhesive layer and backing form separate phases.

30 21. The medical article of claim 17 wherein the adhesive layer comprises a poly(meth)acrylate.

22. The medical article of claim 17 wherein the adhesive layer comprises a fibrous reinforcing material.

23. The medical article of claim 22 wherein the adhesive layer comprises:  
a pressure sensitive adhesive matrix; and  
a fibrous reinforcing material within the pressure sensitive  
5 adhesive matrix;  
wherein the adhesive layer has a yield strength and a tensile  
strength, and wherein the tensile strength is about 0.7 MPa or greater, and  
at least about 150% of the yield strength.
- 10 24. The medical article of claim 23 wherein the pressure sensitive adhesive  
matrix comprises a polymer derived from at least one alkyl ester  
monomer selected from isooctyl acrylate, 2-ethyl-hexyl acrylate, and n-  
butyl acrylate, and at least one co-monomer selected from acrylic acid  
and acrylamide.
- 15 25. The medical article of claim 17 wherein the adhesive layer comprises an  
A-B-A block copolymer.
- 20 26. The medical article of claim 17 wherein the backing comprises melt  
blown fibers.
27. The medical article of claim 17 which is in the form of a wound dressing,  
surgical dressing, medical tape, athletic tape, or surgical drape.
- 25 28. The medical article of claim 17 which is in the form of a sensor, an  
electrode, or an ostomy appliance.
- 30 29. A method of making a medical article, the method comprising:  
providing a backing;  
selecting a stretch removable pressure sensitive adhesive layer  
such that the stretchability of the adhesive layer disposed on the backing  
is greater than that of the backing under the same tension; and

laminating the backing and the pressure sensitive adhesive layer together under conditions of temperature and pressure that allow the adhesive layer and backing to delaminate when removed from skin.

- 5     30.     A stretch removable adhesive article comprising a backing with a predefined tab and a pressure sensitive adhesive layer disposed on a major surface of the backing opposite that of the tab, wherein the predefined tab is located in a central portion of the backing.
- 10    31.     The article of claim 30 wherein the pressure sensitive adhesive is a stretch removable pressure sensitive adhesive.
32.     The article of claim 30 wherein the backing and the adhesive layer are selected such that the stretchability of the adhesive layer is greater than  
15        that of the backing under the same tension.
33.     The article of claim 32 wherein the stretchability at break of the adhesive layer is at least about 300%.
- 20    34.     The article of claim 32 wherein the stretchability at break of the adhesive layer is no greater than about 800%.
35.     The article of claim 32 wherein the stretchability at break of the adhesive layer is at least about 10% greater than that of the backing.  
25
36.     The article of claim 30 wherein the adhesive layer comprises a poly(meth)acrylate.
37.     The article of claim 30 wherein the adhesive layer comprises a reinforced  
30        adhesive.

38. The article of claim 37 wherein the adhesive layer comprises a fibrous reinforcing material.
39. The article of claim 38 wherein the adhesive layer comprises:  
5           a pressure sensitive adhesive matrix; and  
          a fibrous reinforcing material within the pressure sensitive adhesive matrix;  
          wherein the adhesive layer has a yield strength and a tensile strength, and wherein the tensile strength is about 0.7 MPa or greater, and  
10          at least about 150% of the yield strength.
40. The article of claim 39 wherein the pressure sensitive adhesive matrix comprises a polymer derived from at least one alkyl ester monomer selected from isooctyl acrylate, 2-ethyl-hexyl acrylate, and n-butyl  
15          acrylate, and at least one co-monomer selected from acrylic acid and acrylamide.
41. The article of claim 30 wherein the adhesive layer comprises an A-B-A block copolymer.  
20
42. The article of claim 30 wherein the tab comprises a portion of the backing and portion of the adhesive layer.
43. The article of claim 30 wherein the backing comprises two pieces.  
25
44. The article of claim 43 wherein the two backing pieces overlap.
45. The article of claim 43 wherein each backing piece comprises an end free of exposed adhesive, and further wherein the ends free of exposed  
30          adhesive form the predefined tabs.
46. The article of claim 30 which is a medical article.



47. The article of claim 46 which is in the form of a wound dressing, surgical dressing, medical tape, athletic tape, or surgical drape.
- 5 48. The article of claim 46 which is in the form of a sensor, an electrode, or an ostomy appliance.
49. A stretch removable adhesive article comprising a backing with a predefined tab and a stretch removable pressure sensitive adhesive layer  
10 disposed thereon, wherein the predefined tab is located in a central portion of the backing, and further wherein the backing and the adhesive layer are selected such that the stretchability of the adhesive layer is greater than that of the backing under the same tension.
- 15 50. A stretch removable adhesive article comprising a backing with a predefined tab and a stretch removable pressure sensitive adhesive layer disposed thereon, wherein:
- the predefined tab is located in a central portion of the backing;
- the backing and the adhesive layer are selected such that the  
20 stretchability of the adhesive layer is greater than that of the backing under the same tension; and
- the adhesive layer comprises:
- a pressure sensitive adhesive matrix; and
- a fibrous reinforcing material within the pressure sensitive  
25 adhesive matrix;
- wherein the adhesive layer has a yield strength and a tensile strength, and wherein the tensile strength is about 0.7 MPa or greater, and at least about 150% of the yield strength.
- 30 51. A method of removing an article from a surface, the method comprising:
- providing a stretch removable adhesive article adhered to a surface, wherein the article comprises a backing with a predefined tab

and a pressure sensitive adhesive layer disposed thereon, wherein the predefined tab is located in a central portion of the backing; and  
pulling on the tab to stretch the adhesive article in an amount sufficient to remove the article from the surface.

5

52. The method of claim 51 wherein the pressure sensitive adhesive is a stretch removable pressure sensitive adhesive.

10

53. The method of claim 51 wherein the backing and the adhesive layer are selected such that the stretchability of the adhesive layer is greater than that of the backing under the same tension.

15

54. The method of claim 53 wherein the stretchability at break of the adhesive layer is at least about 300%.

55. The method of claim 53 wherein the stretchability at break of the adhesive layer is at least about 10% greater than that of the backing.

20

56. The method of claim 51 wherein the adhesive layer comprises a poly(meth)acrylate.

57. The method of claim 51 wherein the adhesive layer comprises a reinforced adhesive.

25

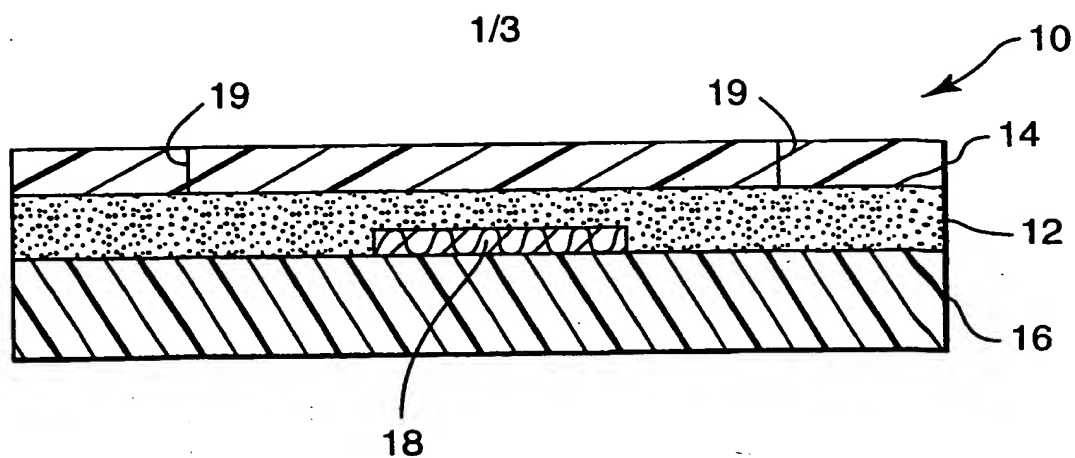
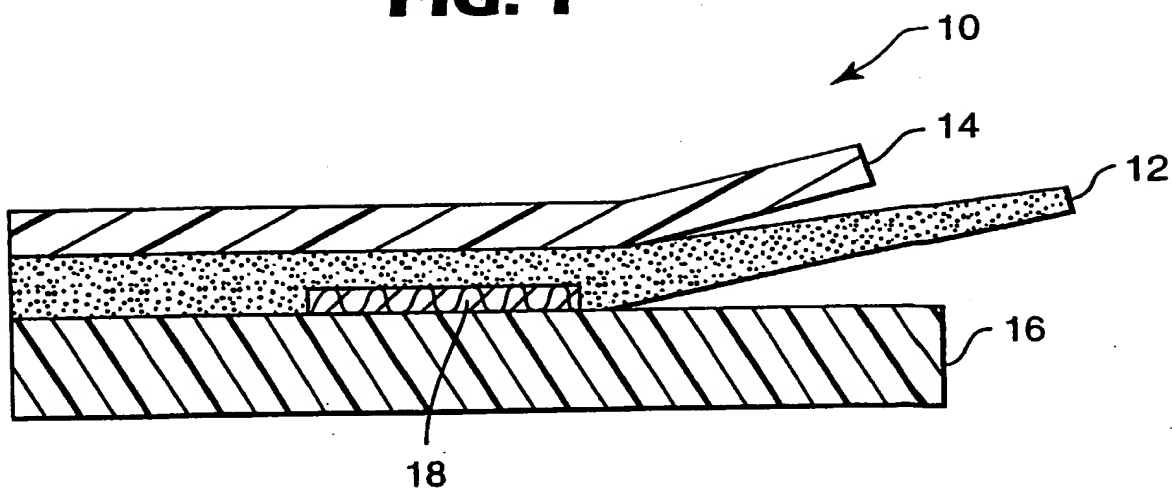
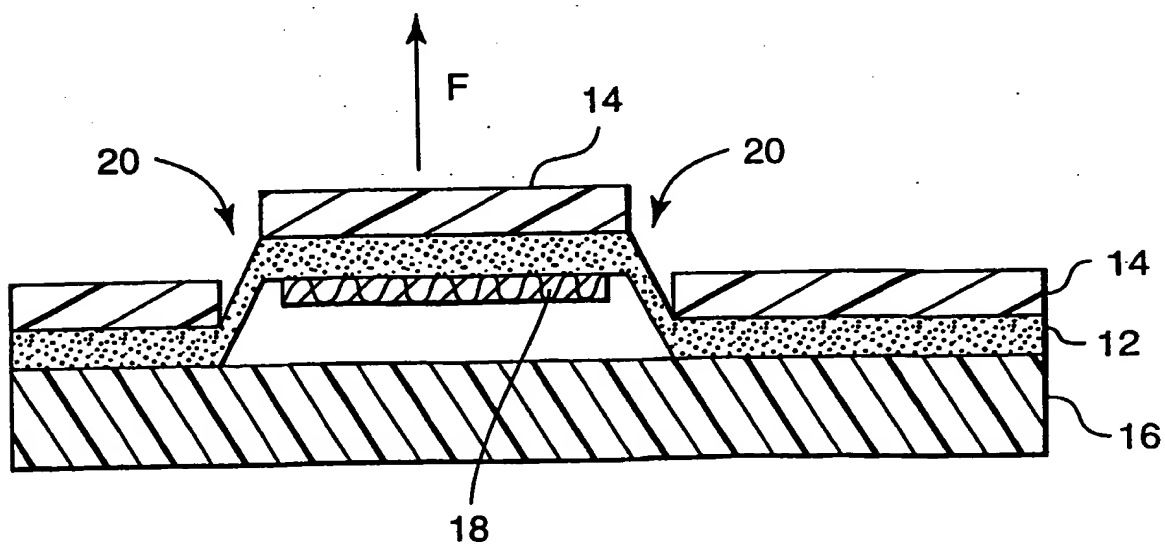
58. The method of claim 57 wherein the adhesive layer comprises:  
a pressure sensitive adhesive matrix; and  
a fibrous reinforcing material within the pressure sensitive adhesive matrix;

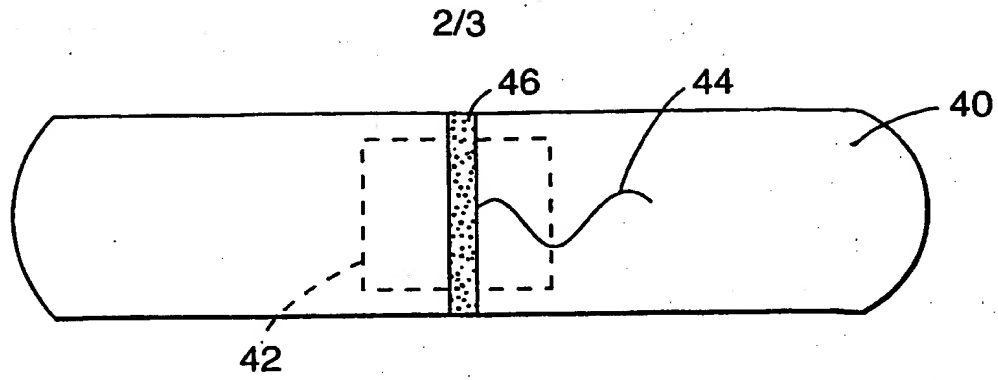
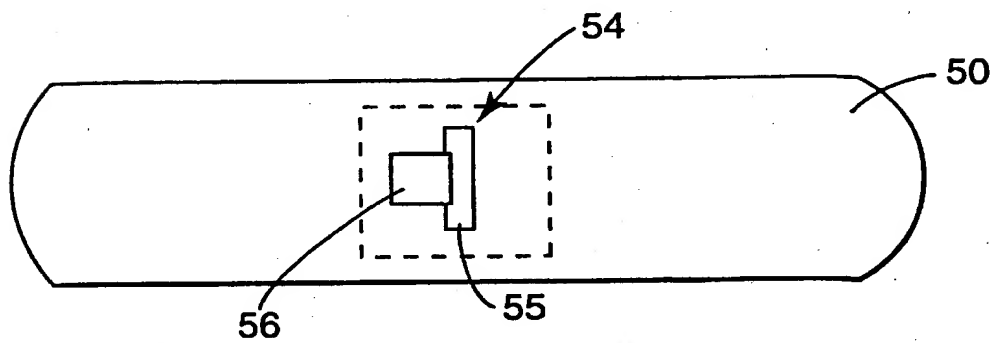
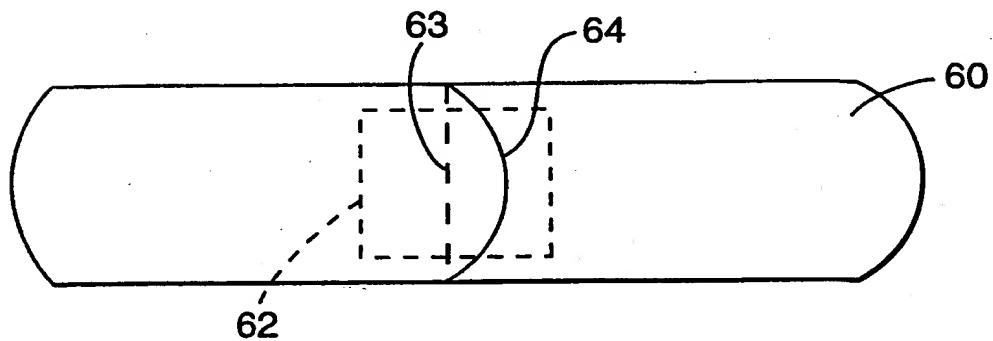
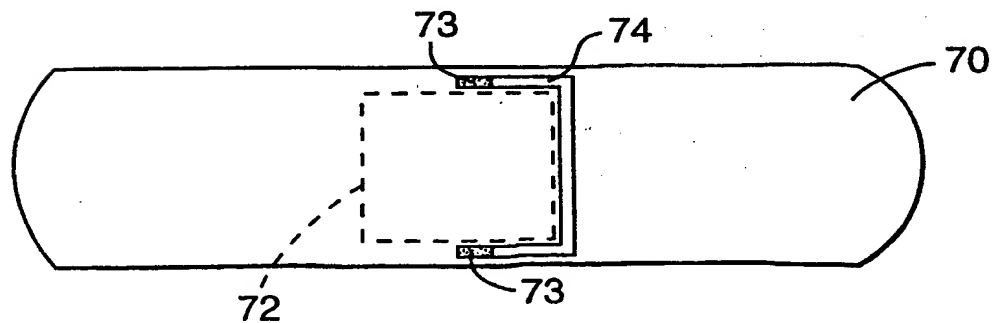
30

wherein the adhesive layer has a yield strength and a tensile strength, and wherein the tensile strength is about 0.7 MPa or greater, and at least about 150% of the yield strength.

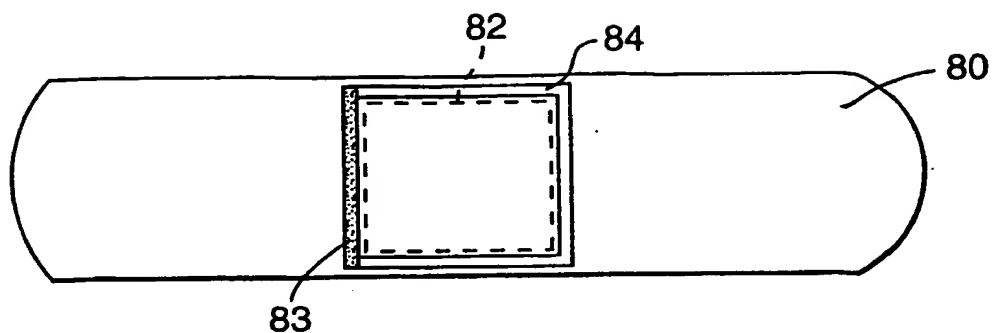
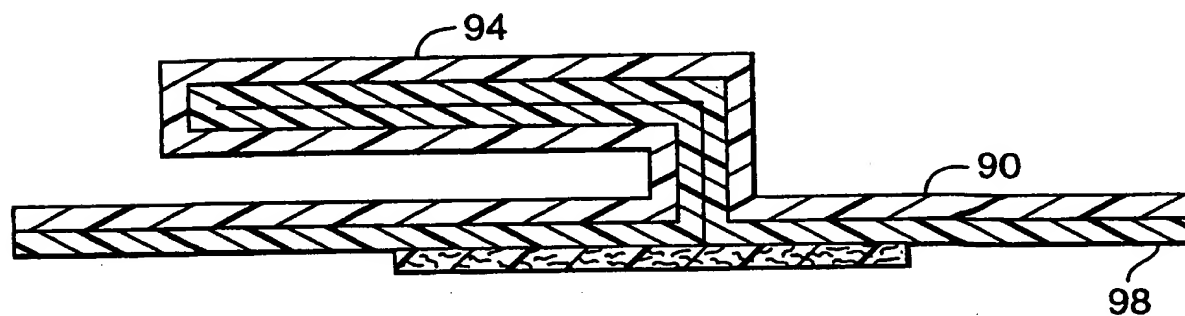
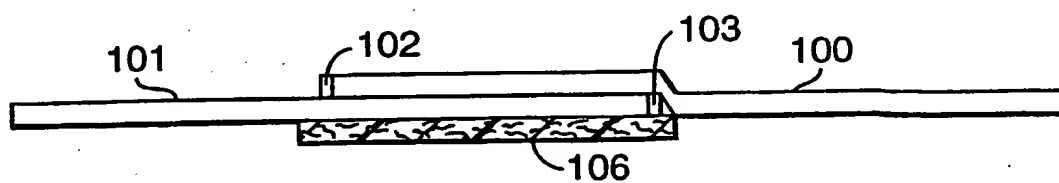
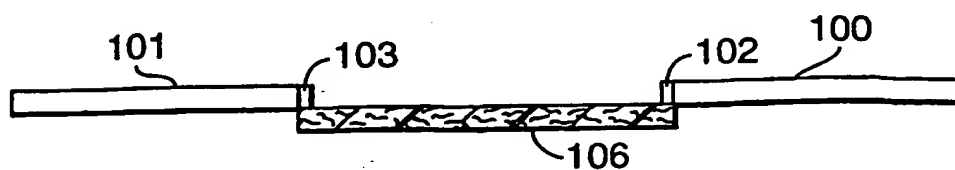
59. The method of claim 58 wherein the pressure sensitive adhesive matrix comprises a polymer derived from at least one alkyl ester monomer selected from isooctyl acrylate, 2-ethyl-hexyl acrylate, and n-butyl acrylate, and at least one co-monomer selected from acrylic acid and acrylamide.
60. The method of claim 51 wherein the adhesive layer comprises an A-B-A block copolymer.
61. The method of claim 51 wherein the tab comprises a portion of the backing and portion of the adhesive layer.
62. The method of claim 51 wherein the backing comprises two pieces.
63. The method of claim 62 wherein the two backing pieces overlap.
64. The method of claim 62 wherein each backing piece comprises an end free of exposed adhesive, and further wherein the ends free of exposed adhesive form the predefined tabs.
65. The method of claim 51 wherein the article is a medical article.
66. The method of claim 65 wherein the medical article is in the form of a wound dressing, surgical dressing, medical tape, athletic tape, or surgical drape.
67. The method of claim 65 wherein the medical article is in the form of a sensor, an electrode, or an ostomy appliance.
68. A method of making a medical article, the method comprising:  
providing a backing with a predefined tab located in a central portion of the backing; and

applying a stretch removable pressure sensitive adhesive to a major surface of the backing opposite that of the predefined tab.

**FIG. 1****FIG. 2****FIG. 3**

**FIG. 4****FIG. 5****FIG. 6****FIG. 7**

3/3

**FIG. 8****FIG. 9****FIG. 10****FIG. 11**





(19) World Intellectual Property Organization  
International Bureau



(43) International Publication Date  
19 September 2002 (19.09.2002)

PCT

(10) International Publication Number  
**WO 02/072162 A3**

(51) International Patent Classification<sup>7</sup>: **A61L 15/58,**  
15/24

55133-3427 (US). **BENNETT, Robert, C.**; Post Office  
Box 33427, Saint Paul, MN 55133-3427 (US).

(21) International Application Number: PCT/US02/00350

(74) Agent: **GWIN, Doreen, S., L.**; Office of Intellectual Property  
Counsel, Post Office Box 33427, Saint Paul, MN  
55133-3427 (US).

(22) International Filing Date: 8 January 2002 (08.01.2002)

(25) Filing Language: English

(26) Publication Language: English

(30) Priority Data:  
09/764,540 17 January 2001 (17.01.2001) US

(71) Applicant: **3M INNOVATIVE PROPERTIES COMPANY** [US/US]; 3M Center, Post Office Box 33427, Saint  
Paul, MN 55133-3427 (US).

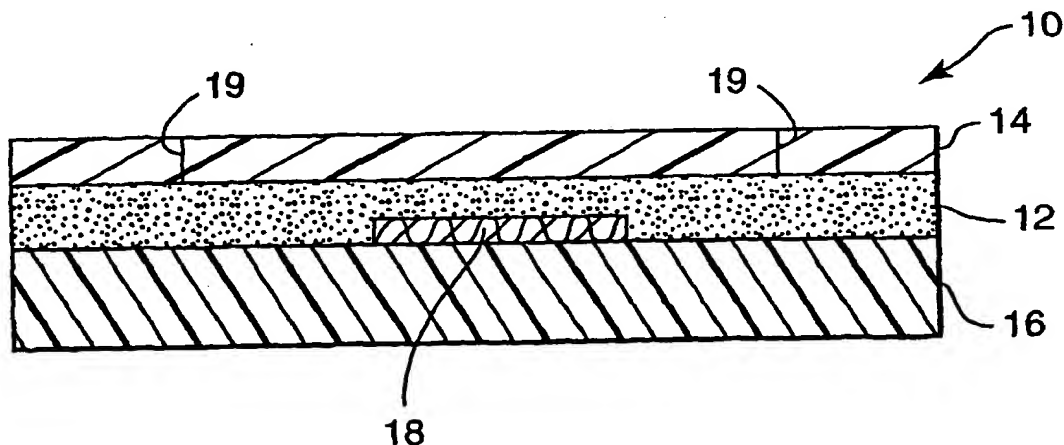
(81) Designated States (*national*): AE, AG, AL, AM, AT (utility  
model), AT, AU, AZ, BA, BB, BG, BR, BY, BZ, CA,  
CH, CN, CO, CR, CU, CZ (utility model), CZ, DE (utility  
model), DE, DK, DM, DZ, EC, EE (utility model), EE,  
ES, FI (utility model), FI, GB, GD, GE, GH, GM, HR, HU,  
ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS,  
LT, LU, LV, MA, MD, MG, MK, MN, MW, MX, MZ, NO,  
NZ, OM, PH, PL, PT, RO, RU, SD, SE, SG, SI, SK (utility  
model), SK, SL, TJ, TM, TN, TR, TT, TZ, UA, UG, UZ,  
VN, YU, ZA, ZM, ZW.

(84) Designated States (*regional*): ARIPO patent (GH, GM,  
KE, LS, MW, MZ, SD, SL, SZ, TZ, UG, ZM, ZW),  
Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM),  
European patent (AT, BE, CH, CY, DE, DK, ES, FI, FR,  
GB, GR, IE, IT, LU, MC, NL, PT, SE, TR), OAPI patent  
(BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR,  
NE, SN, TD, TG).

Published:  
— with international search report

[Continued on next page]

(54) Title: STRETCH REMOVABLE ADHESIVE ARTICLES AND METHODS



(57) Abstract: Pressure sensitive adhesive articles and methods, particularly stretch removable adhesive articles that are preferably for use in adhering to skin or like delicate surfaces. Preferably, stretch removability of the article occurs as a result of the selection of a stretch removable pressure sensitive adhesive. In one embodiment of the articles and methods, the adhesive and backing delaminate upon removal. In another embodiment of the articles and methods, the backing includes a predefined tab located in a central location of the backing.

WO 02/072162 A3



(88) Date of publication of the international search report:  
3 April 2003

*For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.*

## INTERNATIONAL SEARCH REPORT

International Application No  
PCT/US 02/00350A. CLASSIFICATION OF SUBJECT MATTER  
IPC 7 A61L15/58 A61L15/24

According to International Patent Classification (IPC) or to both national classification and IPC

## B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)  
IPC 7 A61L A61F C09J

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Electronic data base consulted during the international search (name of data base and, where practical, search terms used)

EPO-Internal, WPI Data, BIOSIS, MEDLINE, COMPENDEX, PAJ

## C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category *	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
A	EP 0 747 027 A (BEIERSDORF AG) 11 December 1996 (1996-12-11) column 2, line 39 - column 3, line 22 ---	1-29
A	EP 0 922 739 A (BEIERSDORF AG) 16 June 1999 (1999-06-16) the whole document ---	1-29
A	US 5 989 708 A (KRECKEL KARL W) 23 November 1999 (1999-11-23) column 6, line 21 - line 57 column 7, line 3 - line 7; figures 4-6,8-11 ---	1-68
A	DE 27 28 346 A (JOHNSON & JOHNSON) 5 January 1978 (1978-01-05) page 4, paragraph 4 - page 5, paragraph 1 ---	1-29
	-/--	

☒ Further documents are listed in the continuation of box C.☒ Patent family members are listed in annex.

## \* Special categories of cited documents:

- \*A\* document defining the general state of the art which is not considered to be of particular relevance
- \*E\* earlier document but published on or after the international filing date
- \*L\* document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)
- \*O\* document referring to an oral disclosure, use, exhibition or other means
- \*P\* document published prior to the international filing date but later than the priority date claimed

- \*T\* later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention
- \*X\* document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone
- \*Y\* document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art.
- \*&\* document member of the same patent family

Date of the actual completion of the international search

29 November 2002

Date of mailing of the international search report

17. 12. 2002

Name and mailing address of the ISA

European Patent Office, P.B. 5818 Patentlaan 2  
NL - 2280 HV Rijswijk  
Tel. (+31-70) 340-2040, Tx. 31 651 epo nl,  
Fax: (+31-70) 340-3016

Authorized officer

Leutner, S

## INTERNATIONAL SEARCH REPORT

International Application No.

PCT/US 02/00350

## C.(Continuation) DOCUMENTS CONSIDERED TO BE RELEVANT

Category *	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
A	EP 0 985 391 A (BEIERSDORF AG) 15 March 2000 (2000-03-15) the whole document ----	30-68
A	US 5 772 623 A (CONTE STEPHEN) 30 June 1998 (1998-06-30) claim 1; figures 1-8 ----	30-68
A	EP 0 845 517 A (BEIERSDORF AG) 3 June 1998 (1998-06-03) claims 4-9 -----	30-68

## INTERNATIONAL SEARCH REPORT

International Application No

PCT/US 02/00350

Patent document cited in search report		Publication date	Patent family member(s)		Publication date
EP 0747027	A	11-12-1996	EP	0747027 A2	11-12-1996
EP 0922739	A	16-06-1999	DE	19755222 A1	24-06-1999
			AU	752442 B2	19-09-2002
			AU	8936198 A	01-07-1999
			EP	0922739 A1	16-06-1999
US 5989708	A	23-11-1999	US	5516581 A	14-05-1996
			US	5672402 A	30-09-1997
			AU	654315 B2	03-11-1994
			AU	9157591 A	22-07-1992
			BR	9107249 A	22-02-1994
			CA	2096935 A1	21-06-1992
			DE	69124626 D1	20-03-1997
			DE	69124626 T2	10-07-1997
			EP	0563272 A1	06-10-1993
			ES	2097902 T3	16-04-1997
			HK	1007761 A1	23-04-1999
			JP	3063915 B2	12-07-2000
			JP	6504077 T	12-05-1994
			KR	185422 B1	01-04-1999
			MX	9102731 A1	31-01-1994
			WO	9211333 A1	09-07-1992
			ZA	9110081 A	27-01-1993
DE 2728346	A	05-01-1978	US	4024312 A	17-05-1977
			AU	518205 B2	17-09-1981
			AU	2629277 A	04-01-1979
			BR	7704063 A	11-07-1978
			CA	1080559 A1	01-07-1980
			DE	2728346 A1	05-01-1978
			ES	459978 A1	01-12-1978
			FR	2355893 A1	20-01-1978
			GB	1559933 A	30-01-1980
			IT	1079059 B	08-05-1985
			JP	1305861 C	13-03-1986
			JP	53000235 A	05-01-1978
			JP	60031233 B	20-07-1985
			NL	7706854 A ,B,	28-12-1977
			NZ	184296 A	08-06-1979
			PH	13292 A	04-03-1980
			ZA	7703754 A	31-01-1979
EP 0985391	A	15-03-2000	DE	19841550 A1	23-03-2000
			AU	4463499 A	16-03-2000
			EP	0985391 A2	15-03-2000
US 5772623	A	30-06-1998	NONE		
EP 0845517	A	03-06-1998	DE	19649636 A1	04-06-1998
			AT	204893 T	15-09-2001
			DE	59704433 D1	04-10-2001
			EP	0845517 A2	03-06-1998
			ES	2162179 T3	16-12-2001

# INTERNATIONAL SEARCH REPORT

International application No.  
PCT/US 02/00350

## Box I Observations where certain claims were found unsearchable (Continuation of item 1 of first sheet)

This International Search Report has not been established in respect of certain claims under Article 17(2)(a) for the following reasons:

1. ☐ Claims Nos.:  
because they relate to subject matter not required to be searched by this Authority, namely:
  
2. ☐ Claims Nos.:  
because they relate to parts of the International Application that do not comply with the prescribed requirements to such an extent that no meaningful International Search can be carried out, specifically:
  
3. ☐ Claims Nos.:  
because they are dependent claims and are not drafted in accordance with the second and third sentences of Rule 6.4(a).

## Box II Observations where unity of invention is lacking (Continuation of item 2 of first sheet)

This International Searching Authority found multiple inventions in this international application, as follows:

see additional sheet

1. ☒ As all required additional search fees were timely paid by the applicant, this International Search Report covers all searchable claims.
  
2. ☐ As all searchable claims could be searched without effort justifying an additional fee, this Authority did not invite payment of any additional fee.
  
3. ☐ As only some of the required additional search fees were timely paid by the applicant, this International Search Report covers only those claims for which fees were paid, specifically claims Nos.:
  
4. ☐ No required additional search fees were timely paid by the applicant. Consequently, this International Search Report is restricted to the invention first mentioned in the claims; it is covered by claims Nos.:

Remark on Protest

- ☐ The additional search fees were accompanied by the applicant's protest.
- ☒ No protest accompanied the payment of additional search fees.

FURTHER INFORMATION CONTINUED FROM PCT/ISA/ 210

This International Searching Authority found multiple (groups of) inventions in this international application, as follows:

1. Claims: 1-29

Stretch removable medical article, method of removing this medical article from skin and methods for producing this article which is characterised by stretching the medical article in an amount sufficient to delaminate the adhesive layer from the backing.

2. Claims: 30-68

Stretch removable adhesive article, methods for removing this article from skin and methods for producing this article which is characterised by a predefined tab located in the central portion of the backing

***This Page Blank (uspto)***